andro
for the illuminated

SUSTAINABILITY FOCUSED

GOOD DESIGN AWARD® WINNER

FOR THE ILLUMINATED

↓ INCU, AUSTRALIA

Through the challenges of finding a local architectural luminaire range where forward thinking was a pillar, the vision for **andro** was borne.

A founding desire for lighting essentials that could bring equal parts uniformity, performance and creativity to a project.

One that uniquely represented us and our creative approach to architectural lighting design, and crucially, what we felt projects demanded.

andro has been recognised for its trailblazing and innovative approach to lighting. From pioneering sustainability developments to a reimagined view of illumination and its possibilities.

GOOD DESIGN AWARD® WINNER

Winner for Product Design in recognition of outstanding design and innovation.

Origin: ~~The streets of~~ Melbourne, Australia

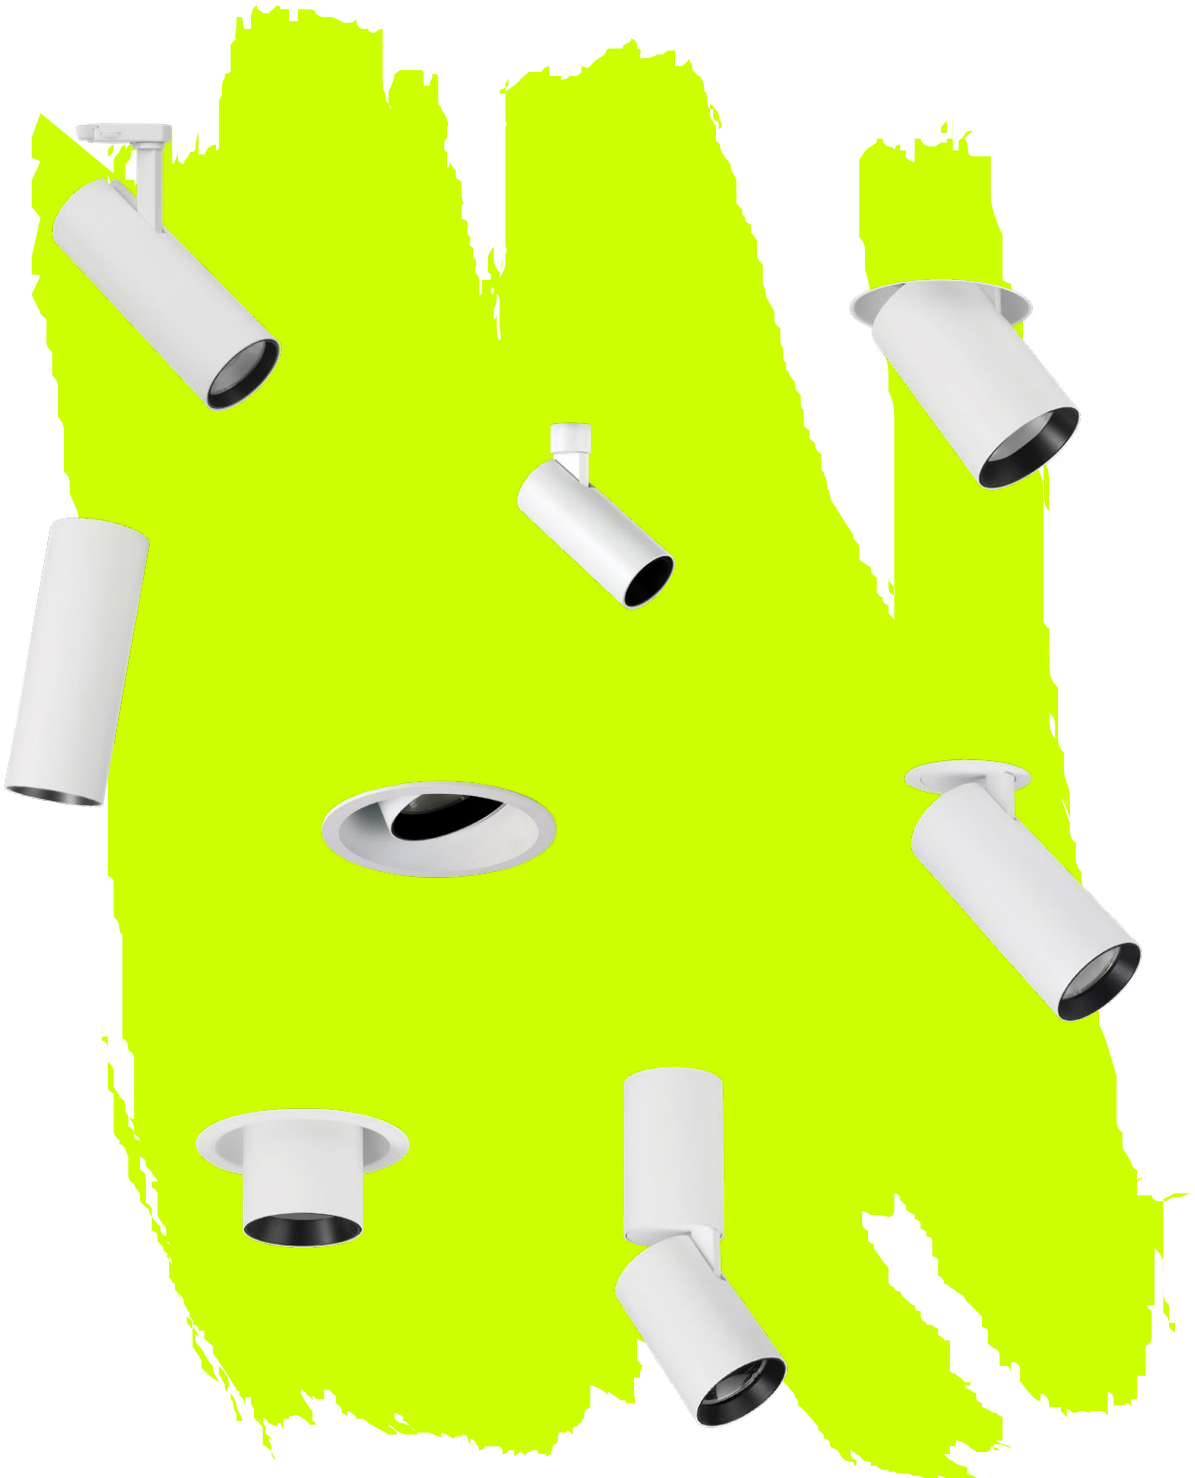

↑ CASAMBI READY

TRACKLIGHTS	
SIZE	MEASUREMENTS (AxBmm)
XXS	Ø 35 x 120
XS	Ø 52.2 x 140
S	Ø 62 x 172
M	Ø 75.6 x 210
L	Ø 87.5 x 235



SEMI-RECESSED SPOTLIGHTS	
SIZE	MEASUREMENTS (AxBmm)
XXS	Ø 35 x 120
XS	Ø 52.2 x 140
S	Ø 62 x 172
M	Ø 75.6 x 180



SURFACE ADJUSTABLE SPOTLIGHTS	
SIZE	MEASUREMENTS (AxBxCmm)
XXS	Ø 35 x 75 (housing) x 75 (gear box)
XS	Ø 52 x 85 (housing) x 85 (gear box)
S	Ø 62 x 100 (housing) x 100 (gear box)
S DALI	Ø 62 x 100 (housing) x 130 (gear box)
M	Ø 75.6 x 120 (housing) x 120 (gear box)



SURFACE FIXED SPOTLIGHTS	
SIZE	MEASUREMENTS (AxBmm)
XXS	Ø 35 x 120
XS	Ø 52.2 x 140
S	Ø 62 x 172
M	Ø 75.6 x 210
L	Ø 87.5 x 235

PENDANTS	
SIZE	MEASUREMENTS (AxBmm)
XXS	Ø 35 x 120
XS	Ø 52.2 x 140
S	Ø 62 x 172
M	Ø 75.6 x 210
L	Ø 87.5 x 235



TRIM DOWNLIGHTS	
SIZE	MEASUREMENTS (AxBxCxDmm)
XXS	Ø 35 x 75 (tube) ; Ø 70 x 97 (housing)
XS	Ø 52.2 x 85 (tube) ; Ø 99 x 118 (housing)
S	Ø 62 x 100 (tube) ; Ø 110 x 137 (housing)
M	Ø 75.6 x 120 (tube) ; Ø 128 x 156 (housing)
L	Ø 87.5 x 140 (tube) ; Ø 138.5 x 172 (housing)



TRIMLESS DOWNLIGHTS	
SIZE	MEASUREMENTS (AxBxCxDmm)
XXS	Ø 35 x 75 (tube) ; Ø 110 x 97 (housing)
XS	Ø 52.2 x 85 (tube) ; Ø 160 x 118 (housing)
S	Ø 62 x 100 (tube) ; Ø 220 x 137 (housing)
M	Ø 75.6 x 120 (tube) ; Ø 220 x 156 (housing)
L	Ø 87.5 x 140 (tube) ; Ø 220 x 176.5m (housing)



TILT	
SIZE	MEASUREMENTS (AxBxCmm)
XXS	Ø 35 (tube) ; Ø 75 x 85 (housing)
XS	Ø 52 (tube) ; Ø 94 x 82 (housing)
S	Ø 62 (tube) ; Ø 106 x 102 (housing)
M	Ø 75 (tube) ; Ø 130 x 120 (housing)
L	Ø 87 (tube) ; Ø 145 x 145 (housing)



48V	
SIZE	MEASUREMENTS (AxBmm)
XXXS	Ø 25 x 60 (tube)
XXS	Ø 35 x 75 (tube)
XS	Ø 52.7 x 85 (tube)
S	Ø 62 x 100 (tube)

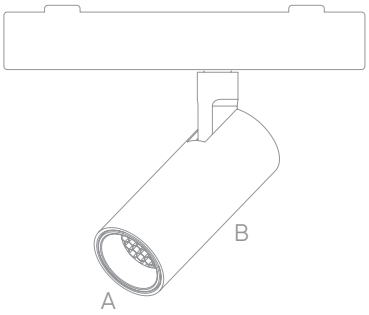

andro
for the illuminated

The
streets
are
talking
dezeen
awards
CASAMBI
AWARDS

BLACK | WHITE | RAW | BRUSHED | POLISHED

2400K

2700K

3000K

4000K

TW

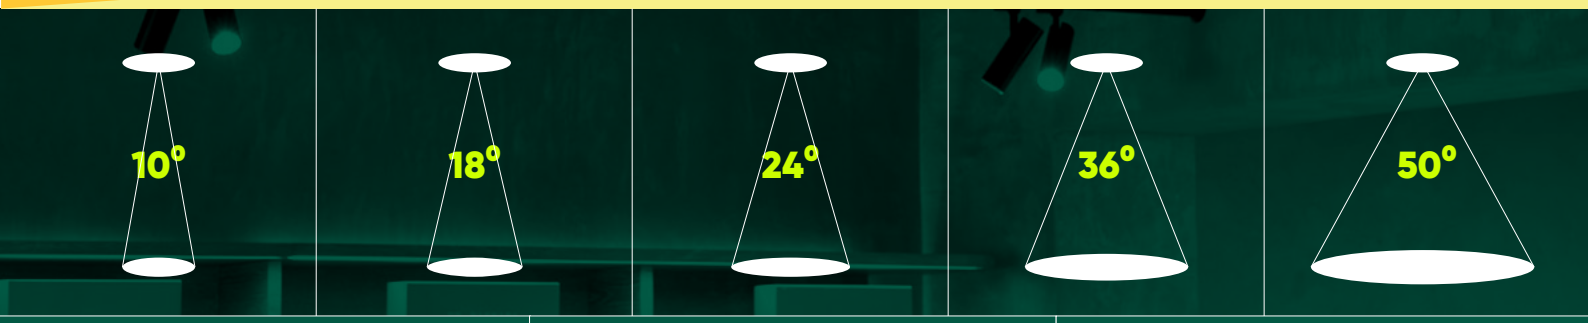

XXXS

25MM

XXS

35MM

XS

52MM

S

62MM

M

75MM

L

87.5MM

GOOD
DESIGN
AWARD®
WINNER
andro
for the illuminated
howdy@andro.lighting
→ andro.lighting