

INSTALLATION GUIDE

Everything you wanted to know but were too afraid to ask

andro.

think. again.

ANDRO ADJUSTABLE SURFACE MOUNTED



WHOA, HOLD IT!

- 1 To avoid non-replaceable damage of custom-painted fittings, the secondary ring must be removed before adjusting the inner tube. The inner tube must be adjusted at ground level before ceiling installation.
- 2 Hit the off switch on any power before install.
- 3 Install must only be carried out by someone suitably qualified.
- 4 Only use the product at the specified voltage and frequency.
- 5 It would be sweet if you ♻️ the packaging.
- 6 Read Step 1 again. Thx.



IP20


IP54

RoHS




1

Use supplied allen key to undo screws on the sides of the fitting.

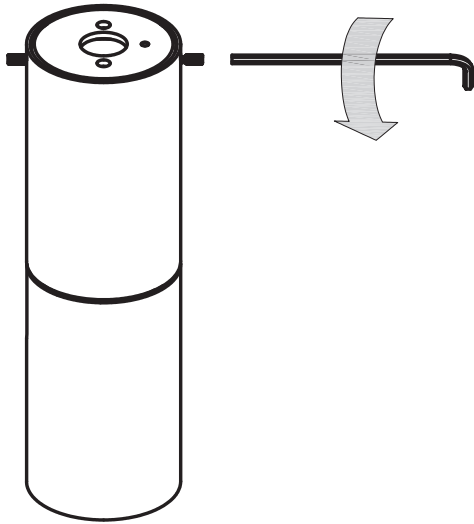


2

Place the ceiling plate on the ceiling and mark location of holes.

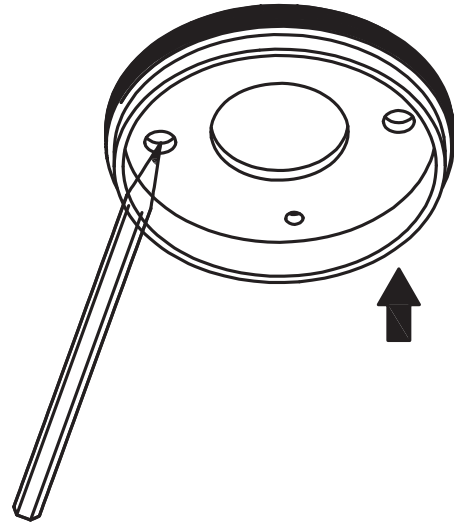


3

Drill 2 x M4 holes in the ceiling at the marked locations.

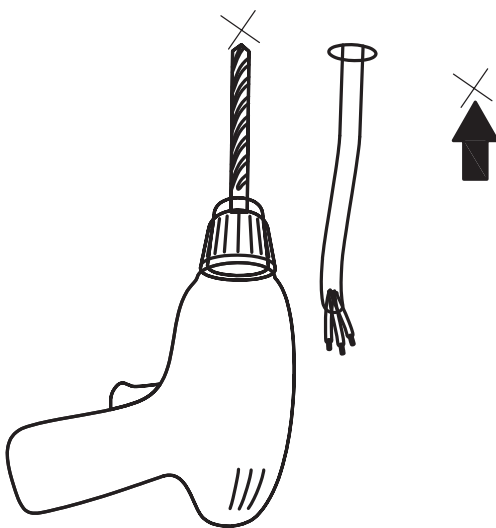


4

Insert the plastic screw plugs into these holes.

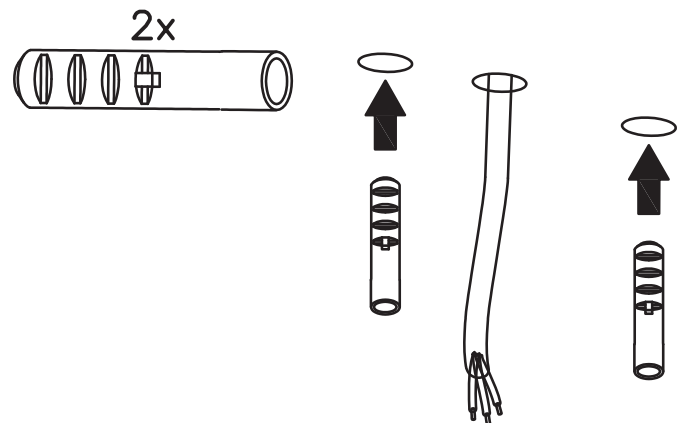


5

Fix the ceiling plate using 2 x M4 screws.

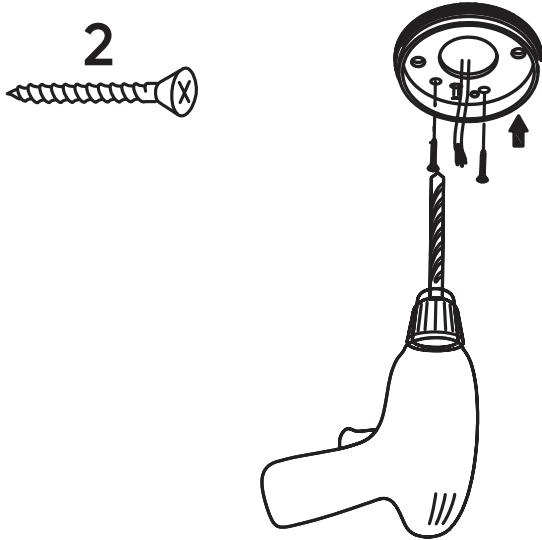


6 IP20

Connect primary wire to terminal block sitting inside of the fitting.

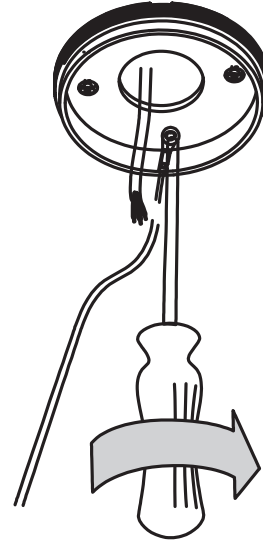


6 IP54

Take out the loose terminal block placed inside the cylinder and connect primary wire to it inside the ceiling. Do not make the wire connection inside the fitting as it will be prone to water damage.

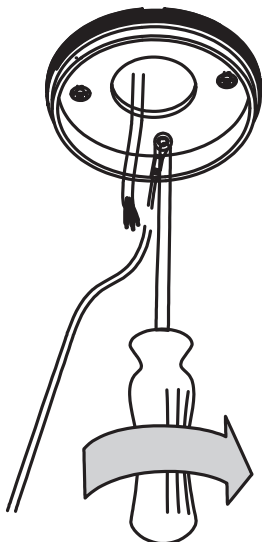


7

Fix the fitting onto the ceiling plate with allen screws.

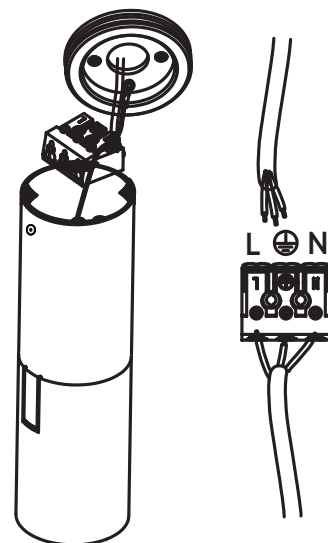


8

Hold upper half of the fitting while rotating or tilting the lower half to achieve desired angle.

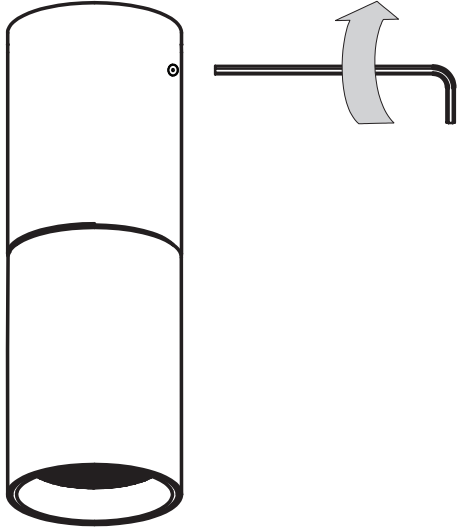

9

Turn ON power supply to complete installation.

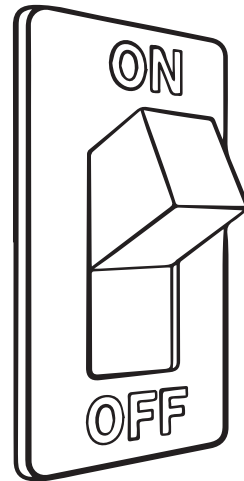

10

Now repurpose your **andro** packaging to store pens and stationery.

