

# RONDO FIXED SURFACE MOUNTED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK



## PHYSICAL

Size	XXS, XS, S
Installation Method	Fixed Surface Mounted
Accessories	Male/Female connector 2M, Open single end tail 3M, Custom
IP Rating	IP20
Finish	Textured White, Textured Black, Textured Silver, Custom

## ELECTRICAL

Wattage	5W/m, 7.2W/m, 8W/m, 10W/m, 14.5W/m, 15W/m, 19.2W/m, 20W/m, 22W/m
Voltage	24V
Dimming Control	All types (order separately), Non-Dim/Phase-Cut/DALI/1-10V/Bluetooth (to be ordered separately)



RoHS




**O P T I C A L**

Optic	Clear, Frost, Opal, Smoked
Distribution	Flood 120°
CCT	1600K, 1800K, 1800K-3000K, 2000K, 2200K, 2400K, 2700K, 2700K-6500K, 3000K, 3500K, 4000K, 6500K, Amber, Blue, Cyan, Dim to Warm 1800K-3000K, Green, RGB, RGBW+1600K, RGBW+2700K, RGBW+3000K, RGBW+3500K, RGBW+4000K, RGBW+5000K, RGBW+6500K, Red, Tunable 1800K-3000K, Tunable 2700K-6500K
CRI	CRI80, CRI90
System Lumen	44lm - 1779lm
System Efficacy	Up to 108lm/W
Lifetime (L70B50)	50,000hrs


**A D D I T I O N A L**

LED Module	Boost 8mm, Boost 10mm, Boost Colour 10mm, Boost Dim to Warm 12mm, Boost Mini 5mm, Boost RGB 10mm, Boost RGBW 12mm, Boost Tunable WH 5mm, Boost Tunable WH 10mm, Boost Ultra Warm 10mm
LED Driver	Remote
Warranty	5 Years


**IP20**

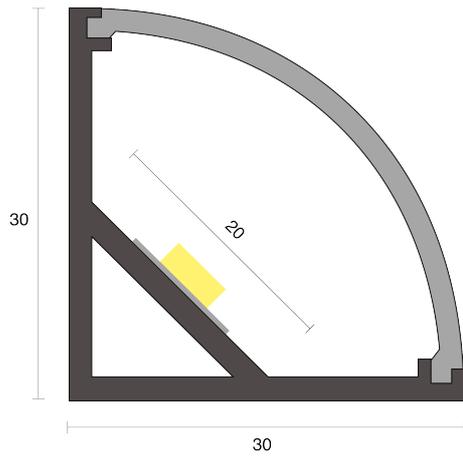

**Rondo S**

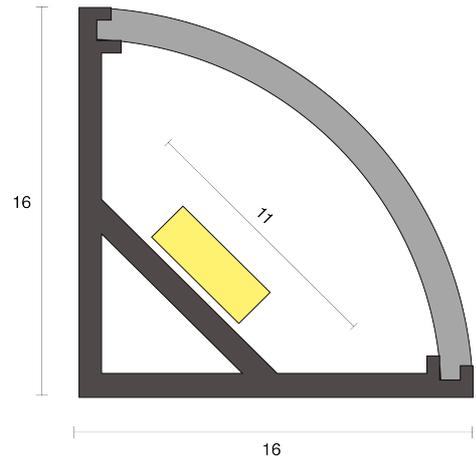

**Rondo XS**

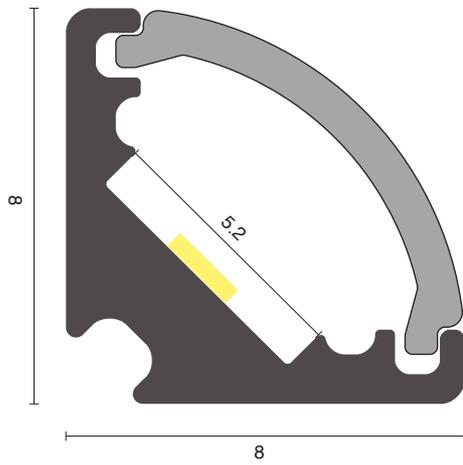

**Rondo XXS**