


# KIT MINI TRIMLESS ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK

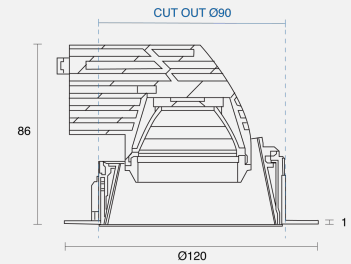

## PHYSICAL

Installation Method	Adjustable Recessed
Dimensions (mm)	Ø120mm x 86mm
Cutout Size (mm)	Ø90mm
Accessories	Without Accessory
IP Rating	IP44
Finish	White
Rotate Angle	350°
Tilt Angle	25°

## ELECTRICAL

Wattage	20W
Forward Current	500mA
Voltage	240V
Dimming Control	Phase-Cut Dimmable




**RoHS**



**IP44**

## O P T I C A L

Optic	Reflector
Distribution	Medium 24°
CCT	3000K
CRI	CRI90
System Lumen	1589lm
System Efficacy	79lm/W
Light Output Ratio	85
Lifetime (L70B50)	50000hrs



## A D D I T I O N A L

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	5 Years

---

**Order Code: ADN07AR01.930STM.20W1101**

**Kit Mini Trimless Adj Rec Downlight White CRI90 3000K 1589lm 24° 20W Phase-Cut Dim IP44 IC Rated**