
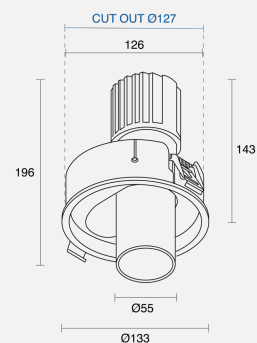


FLOW ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK

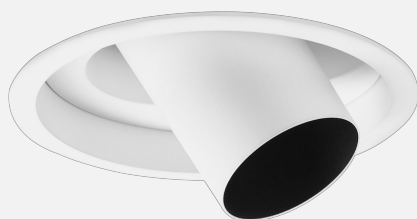

PHYSICAL

Size	XS
Installation Method	Adjustable Recessed
Dimensions (mm)	Ø133mmx196mm
Cutout Size (mm)	Ø127mm
Accessories	Without Accessory
IP Rating	IP20
Finish	Textured White
Tilt Angle	38°

ELECTRICAL

Wattage	15W
Forward Current	350mA
Voltage	240V
Dimming Control	Phase-Cut Dimmable



RoHS



O P T I C A L

Optic	Reflector
Distribution	Narrow 18°
CCT	3000K
CRI	CRI90
System Lumen	566lm
System Efficacy	38lm/W
Light Output Ratio	40
Lifetime (L70B50)	50000hrs

IP20**A D D I T I O N A L**

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	3 Years

Order Code: ADN80AR01.930STN.15W1001

Flow XS Adj Rec Downlight White CRI90 3000K 566lm 18° 15W 350mA Phase-Cut Dim