
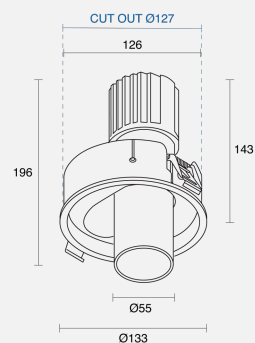


# FLOW ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK

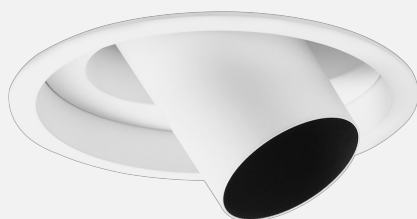

## PHYSICAL

Size	XS
Installation Method	Adjustable Recessed
Dimensions (mm)	Ø133mmx196mm
Cutout Size (mm)	Ø127mm
Accessories	Without Accessory
IP Rating	IP20
Finish	Textured White
Tilt Angle	38°

## ELECTRICAL

Wattage	15W
Forward Current	350mA
Voltage	240V
Dimming Control	Phase-Cut Dimmable



RoHS



## O P T I C A L

Optic	Reflector
Distribution	Narrow 18°
CCT	3000K
CRI	CRI90
System Lumen	566lm
System Efficacy	38lm/W
Light Output Ratio	40
Lifetime (L70B50)	50000hrs

**IP20**

## A D D I T I O N A L

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	3 Years

---

**Order Code: ADN80AR01.930STN.15W1001**

Flow XS Adj Rec Downlight White CRI90 3000K 566lm 18° 15W 350mA Phase-Cut Dim