


FLUX TWIN ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK

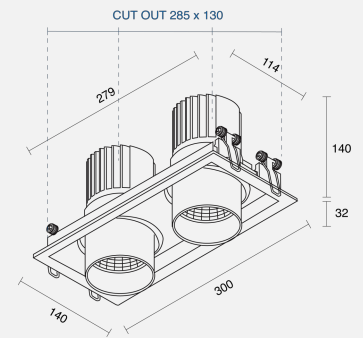

PHYSICAL

| | |
|---------------------|---------------------|
| Size | S |
| Installation Method | Adjustable Recessed |
| Dimensions (mm) | 300mmx140mmx172mm |
| Cutout Size (mm) | 285mmx130mm |
| Accessories | Without Accessory |
| IP Rating | IP20 |
| Finish | Textured White |
| Tilt Angle | 24° |

ELECTRICAL

| | |
|-----------------|--------------------|
| Wattage | 40W |
| Forward Current | 500mA |
| Voltage | 240V |
| Dimming Control | Phase-Cut Dimmable |



RoHS



O P T I C A L

| | |
|--------------------|------------|
| Optic | Reflector |
| Distribution | Medium 24° |
| CCT | 3000K |
| CRI | CRI90 |
| System Lumen | 3312lm |
| System Efficacy | 83lm/W |
| Light Output Ratio | 70 |
| Lifetime (L70B50) | 50000hrs |

IP20**A D D I T I O N A L**

| | |
|------------|--------------------------|
| LED Module | Standard Tridonic SLE G7 |
| LED Driver | Remote |
| Warranty | 3 Years |

Order Code: ADN87AR01.930STM.40W1001

Flux S Twin Adj Rec Downlight White CRI90 3000K 3312lm 24° 2x20W 500mA Phase-Cut Dim