ROLL ADJUSTABLE SURFACE MOUNTED

INDOOR / SPOTLIGHT

ambience

MAKING LIGHT WORK

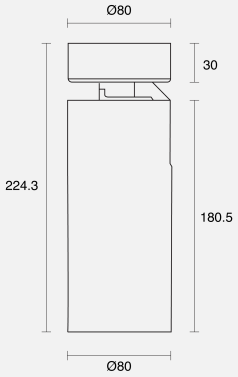

PHYSICAL	
Size	S
Installation Method	Adjustable Surface Mounted
Dimensions (mm)	Ø80mm x 180.5mm
Accessories	Without Accessory
IP Rating	IP20
Finish	White
Rotate Angle	355°
Tilt Angle	90°

ELECTRICAL	
Wattage	20W
Forward Current	500mA
Voltage	240V
Dimming Control	Phase-Cut Dimmable

IP20

OPTICAL	
Optic	Reflector
Distribution	Medium 24°
CCT	3000K
CRI	CRI90
System Lumen	1620lm
System Efficacy	81lm/W
Light Output Ratio	75
Lifetime (L70B50)	50000hrs

ADDITIONAL	
LED Module	Standard Tridonic SLE G7
LED Driver	Integral
Warranty	5 Years

Order Code: ASP36AS01.930STM.20W1001

Roll S Adj SM Spot White CRI90 3000K 1620lm 24° 20W 500mA Phase-Cut Dim IP20