
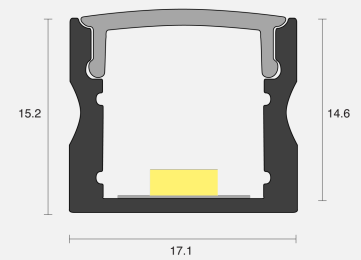


# MEDLEY SURFACE / CONCEALED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

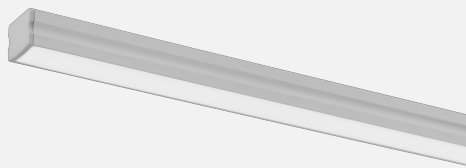

## PHYSICAL

Installation Method	Surface/Concealed
Dimensions (mm)	17.1x15.2mm
Accessories	Open single end tail 3M
IP Rating	IP20
Finish	Textured Silver

## ELECTRICAL

Wattage	20W/m
Voltage	24V
Dimming Control	All types (order separately)



RoHS



**O P T I C A L**

Optic	Opal
Distribution	Flood 120°
CCT	3000K
CRI	CRI90
System Lumen	765lm/m
System Efficacy	38lm/W
Lifetime (L70B50)	50,000hrs

**IP20****A D D I T I O N A L**

LED Module	Boost 10mm
LED Driver	Remote
Warranty	5 Years
Add-Ons	Suitable for concealed mounting

---

**Order Code: BLIK13FS03OP.A510930F.0002**

**Medley Flx SM Kit Silver Opal Boost 10mm 20W/m CRI90 3000K 765lm/m 24V Open single end tail 3M**