
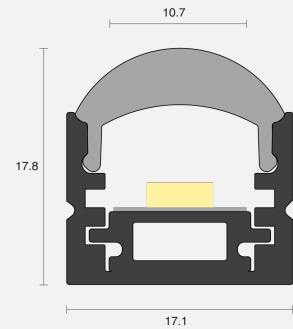


SERENADE SURFACE / CONCEALED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

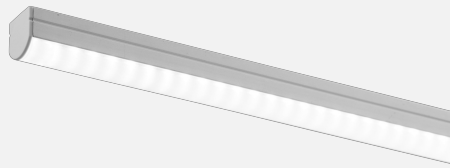

PHYSICAL

Installation Method	Surface/Concealed
Dimensions (mm)	17.1x17.8mm
Accessories	Open single end tail 3M
IP Rating	IP20
Finish	Textured Silver

ELECTRICAL

Wattage	20W/m
Voltage	24V
Dimming Control	All types (order separately)



RoHS



O P T I C A L

Optic	Clear
Distribution	Flood 90°
CCT	3000K
CRI	CRI90
System Lumen	1087lm/m
System Efficacy	54lm/W
Lifetime (L70B50)	50,000hrs

**IP20****A D D I T I O N A L**

LED Module	Boost 10mm
LED Driver	Remote
Warranty	5 Years
Add-Ons	Suitable for concealed mounting

Order Code: BLIK24FS03CL.A510930F.0002

Serenade Fix SM Kit Silver Clear Boost 10mm 20W/m CRI90 3000K 1087lm/m Flood 90° 24V Open single end tail 3M