


# BOOST DIM TO WARM FIXED SURFACE MOUNTED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

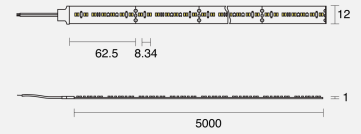

## PHYSICAL

Installation Method	Fixed Surface Mounted
Dimensions (mm)	12mmx1000mm; Cuttable every 65.5mm
Accessories	Rear tails 300mm both ends
IP Rating	IP20

## ELECTRICAL

Wattage	10W/m
Voltage	24V
Dimming Control	All types (order separately)



**RoHS**



**IP20**

## O P T I C A L

Distribution	Flood 120°
CCT	Dim to Warm 1800K-3000K
CRI	CRI90
System Lumen	820lm/m
System Efficacy	82lm/W
Lifetime (L70B50)	50,000hrs

## A D D I T I O N A L

LED Module	SMD2216 224LEDs/m
LED Driver	Remote
Warranty	5 Years

---

**Order Code: BLIS05FS12.9D00F.10W0001**

Boost Dim to Warm Fix SM LED Strip 12mm CRI90 1800K-3000K 120° 224LEDs/m 820lm/m 10W/m  
24V Cut 65.5mm Rear tails 300mm both ends