


# VIRTUOSO SURFACE / SUSPENDED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

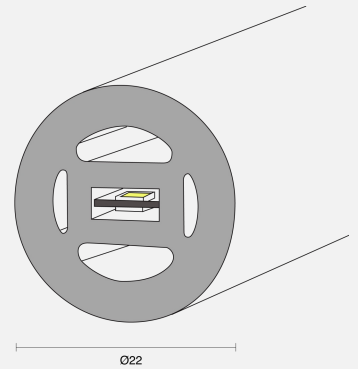

## PHYSICAL

Installation Method	Surface/Suspended
Dimensions (mm)	Ø22mmx1000mm; Cuttable every 20mm
Accessories	End feed 1M WP single end
IP Rating	IP44

## ELECTRICAL

Wattage	20W/m
Voltage	24V
Dimming Control	All types (order separately)



**RoHS**



**IP44**

**O P T I C A L**

Distribution Flood 360°

CCT 3000K

CRI CRI90

System Lumen 950lm

System Efficacy 48lm/W

Lifetime (L70B50) 36,000hrs

**A D D I T I O N A L**

LED Module SMD2216 300LEDs/m

LED Driver Remote

Warranty 3 Years

Add-Ons Dual Bend; Minimum bending radius is Ø75mm; Max. length is 5m with power at single end

---

**Order Code: BLIS10FS22.0930F.20W0101**

Virtuoso Surface/Sus Ø22mm CRI90 3000K 360° 300LEDs/m 70lm/W 2x10W/m 24V IP44 Cut 20mm  
End feed 1M WP single end (EC with glue)