


VIRTUOSO SURFACE / SUSPENDED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

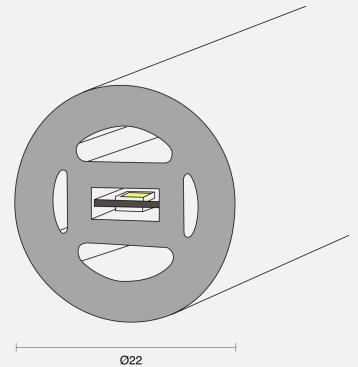

PHYSICAL

Installation Method	Surface/Suspended
Dimensions (mm)	Ø22mmx1000mm; Cuttable every 20mm
Accessories	End feed 1M WP single end
IP Rating	IP44

ELECTRICAL

Wattage	20W/m
Voltage	24V
Dimming Control	All types (order separately)



RoHS



O P T I C A L

Distribution	Flood 360°
CCT	3000K
CRI	CRI90
System Lumen	950lm
System Efficacy	48lm/W
Lifetime (L70B50)	36,000hrs

IP44**A D D I T I O N A L**

LED Module	SMD2216 300LEDs/m
LED Driver	Remote
Warranty	3 Years
Add-Ons	Dual Bend; Minimum bending radius is Ø75mm; Max. length is 5m with power at single end

Order Code: BLIS10FS22.0930F.20W0101

Virtuoso Surface/Sus Ø22mm CRI90 3000K 360° 300LEDs/m 70lm/W 2x10W/m 24V IP44 Cut 20mm
End feed 1M WP single end (EC with glue)