


# VIRTUOSO IP SURFACE / SUSPENDED

OUTDOOR / LINEAR

ambience

MAKING LIGHT WORK

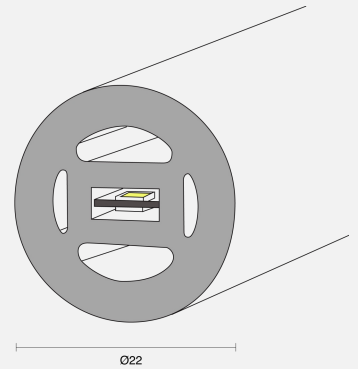

## PHYSICAL

Installation Method	Surface/Suspended
Dimensions (mm)	Ø22mmx1000mm; Cuttable every 35.71mm
Accessories	End feed 1M WP+DC CON single end
IP Rating	IP65

## ELECTRICAL

Wattage	20W/m
Voltage	24V
Dimming Control	All types (order separately)



**RoHS**



**O P T I C A L**

Distribution	Flood 360°
CCT	3000K
CRI	CRI90
System Lumen	950lm
System Efficacy	48lm/W
Lifetime (L70B50)	36,000hrs

**IP65****A D D I T I O N A L**

LED Module	SMD2835 168LEDs/m
LED Driver	Remote
Warranty	3 Years
Add-Ons	Dual Bend; Minimum bending radius is Ø75mm; Max. length is 5m with power at single end

---

**Order Code: BLIS10FS22.0930F.20W0201**

Virtuoso Surface/Sus Ø21M WP+DC CONm CRI90 3000K 360° 168LEDs/m 170lm/W 2x10W/m 24V IP65 End feed 1M WP+DC CON single end (sealed EC)