


VIRTUOSO IP SURFACE / SUSPENDED

OUTDOOR / LINEAR

ambience

MAKING LIGHT WORK

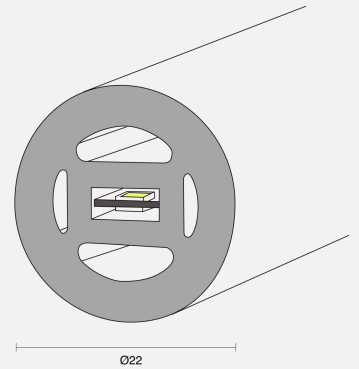

PHYSICAL

| | |
|---------------------|--------------------------------------|
| Installation Method | Surface/Suspended |
| Dimensions (mm) | Ø22mmx1000mm; Cuttable every 35.71mm |
| Accessories | End feed 1M WP+DC CON single end |
| IP Rating | IP65 |

ELECTRICAL

| | |
|-----------------|------------------------------|
| Wattage | 20W/m |
| Voltage | 24V |
| Dimming Control | All types (order separately) |



RoHS



O P T I C A L

| | |
|-------------------|------------|
| Distribution | Flood 360° |
| CCT | 3000K |
| CRI | CRI90 |
| System Lumen | 950lm |
| System Efficacy | 48lm/W |
| Lifetime (L70B50) | 36,000hrs |

IP65**A D D I T I O N A L**

| | |
|------------|--|
| LED Module | SMD2835 168LEDs/m |
| LED Driver | Remote |
| Warranty | 3 Years |
| Add-Ons | Dual Bend; Minimum bending radius is Ø75mm; Max. length is 5m with power at single end |

Order Code: BLIS10FS22.0930F.20W0201

Virtuoso Surface/Sus Ø21M WP+DC CONm CRI90 3000K 360° 168LEDs/m 170lm/W 2x10W/m 24V IP65 End feed 1M WP+DC CON single end (sealed EC)