
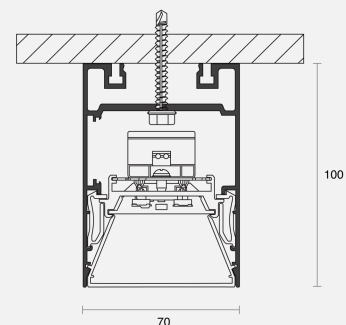


PURE 3 SURFACE MOUNTED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

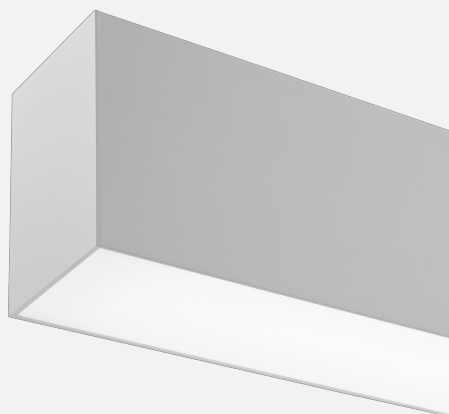

PHYSICAL

Installation Method	Surface Mounted
Dimensions (mm)	70mmx100mmx1155mm
IP Rating	IP20
Finish	Textured Silver

ELECTRICAL

Wattage	18.9
Forward Current	200mA
Voltage	240V
Dimming Control	DALI-Dimmable



RoHS



IP20

O P T I C A L

Optic	Microprism & Microfoil
-------	------------------------

Distribution	Direct Only
--------------	-------------

CCT	3000K
-----	-------

CRI	CRI90
-----	-------

System Lumen	1665.63
--------------	---------

System Efficacy	93lm/W
-----------------	--------

Light Output Ratio	80
--------------------	----

Lifetime (L70B50)	50,000hrs
-------------------	-----------

A D D I T I O N A L

LED Module	Tridonic Linear LLE
------------	---------------------

LED Driver	Integral
------------	----------

Warranty	5 Years
----------	---------

Order Code: P33A115.9006E1930.200MAMMDD

Pure 3 Surface Mounted 1155mm Textured Silver Direct Only CRI90 3000K 200mA Microprism & Microfoil DALI Dim