
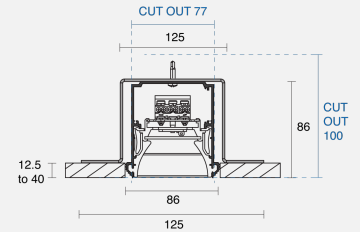


PURE 3 RECESSED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

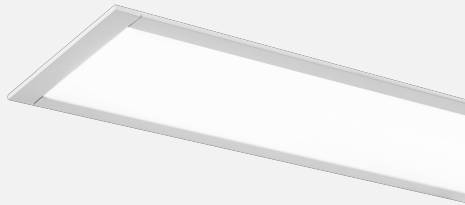

PHYSICAL

Installation Method	Recessed
Dimensions (mm)	86mmx86mmx1171mm
Cutout Size (mm)	77mmx100mm
IP Rating	IP20
Finish	Textured Silver

ELECTRICAL

Wattage	18.9
Forward Current	200mA
Voltage	240V
Dimming Control	DALI-Dimmable



RoHS



IP20

O P T I C A L

Optic	Microprism & Microfoil
-------	------------------------

Distribution	Direct Only
--------------	-------------

CCT	3000K
-----	-------

CRI	CRI90
-----	-------

System Lumen	1665.63
--------------	---------

System Efficacy	93lm/W
-----------------	--------

Light Output Ratio	80
--------------------	----

Lifetime (L70B50)	50,000hrs
-------------------	-----------

A D D I T I O N A L

LED Module	Tridonic Linear LLE
------------	---------------------

LED Driver	Integral
------------	----------

Warranty	5 Years
----------	---------

Order Code: P33E117.9006E1930.200MAMMDD

Pure 3 Recessed 1171mm Textured Silver Direct Only CRI90 3000K 200mA Microprism & Microfoil DALI Dim