
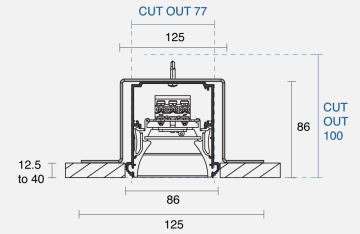


PURE 3 RECESSED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

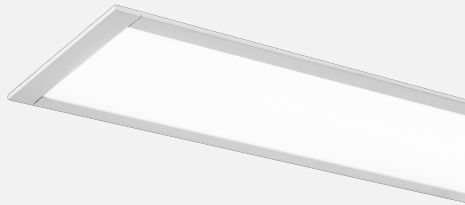

PHYSICAL

Installation Method	Recessed
Dimensions (mm)	86mmx86mmx1171mm
Cutout Size (mm)	77mmx100mm
IP Rating	IP20
Finish	Textured Silver

ELECTRICAL

Wattage	18.9
Forward Current	200mA
Voltage	240V
Dimming Control	DALI-Dimmable



RoHS



IP20

O P T I C A L

Optic Microprism & Microfoil

Distribution Direct Only

CCT 3000K

CRI CRI90

System Lumen 1665.63

System Efficacy 93lm/W

Light Output Ratio 80

Lifetime (L70B50) 50,000hrs

A D D I T I O N A L

LED Module Tridonic Linear LLE

LED Driver Integral

Warranty 5 Years

Order Code: P33E117.9006E1930.200MAMMDD

Pure 3 Recessed 1171mm Textured Silver Direct Only CRI90 3000K 200mA Microprism & Microfoil DALI Dim