
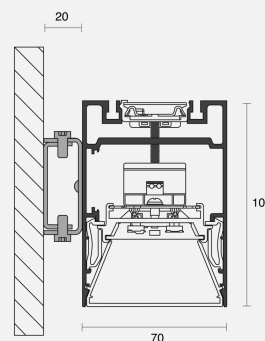


PURE 3 WALL MOUNTED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

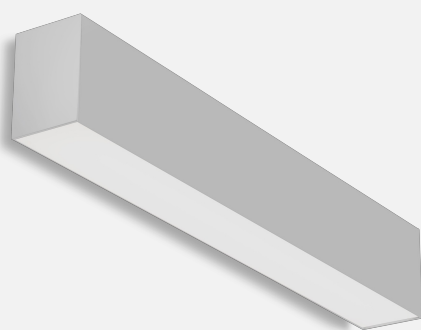

PHYSICAL

Installation Method	Wall Mounted
Dimensions (mm)	70mmx100mmx1155mm
IP Rating	IP20
Finish	Textured Silver

ELECTRICAL

Wattage	18.9
Forward Current	200mA
Voltage	240V
Dimming Control	DALI-Dimmable



RoHS



IP20

O P T I C A L

Optic Microprism & Microfoil

Distribution Direct Only

CCT 3000K

CRI CRI90

System Lumen 1665.63

System Efficacy 93lm/W

Light Output Ratio 80

Lifetime (L70B50) 50,000hrs

A D D I T I O N A L

LED Module Tridonic Linear LLE

LED Driver Integral

Warranty 5 Years

Order Code: **P33W115.9006E1930.200MAMMDD**

Pure 3 Wall Mounted 1155mm Textured Silver Direct Only CRI90 3000K 200mA Microprism & Microfoil DALI Dim