

ANDRO IP FIXED SURFACE MOUNTED

OUTDOOR / SPOTLIGHT

ambience

MAKING LIGHT WORK



PHYSICAL

Size	XS, S, M, L
Installation Method	Fixed Surface Mounted
Accessories	Honeycomb Louvre, Without Accessory
IP Rating	IP65
Finish	Textured White, Textured Black, Custom

ELECTRICAL

Wattage	10W, 15W, 25W, 35W
Forward Current	250mA, 350mA, 600mA, 900mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Phase-Cut Dimmable

NARROW



MEDIUM



WIDE



FLOOD



RoHS

O P T I C A L


Optic	Lens
Distribution	Narrow / Medium / Wide / Flood
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	882lm - 3177lm
System Efficacy	Up to 95lm/W
Light Output Ratio	80
Lifetime (L70B50)	50,000hrs

A D D I T I O N A L


LED Module	Standard Tridonic SLE G7
LED Driver	Integral, Remote
Warranty	5 Years




IP65

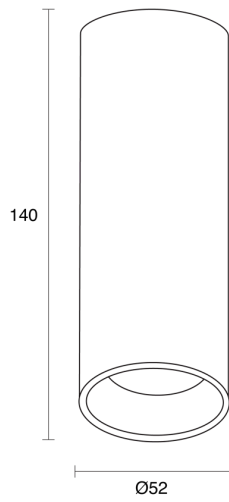


Andro XS

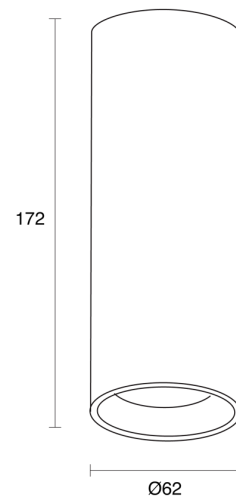

Andro S

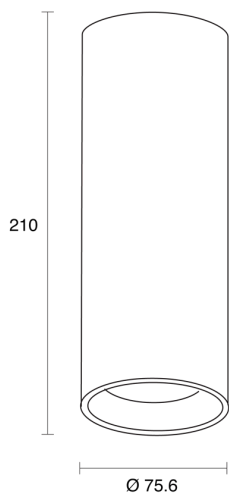

Andro M

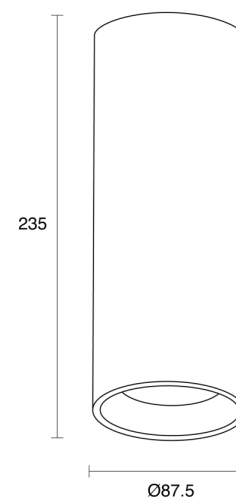

Andro L