

ANDRO FLEX SUSPENDED

INDOOR / PENDANT

ambience

MAKING LIGHT WORK



PHYSICAL

Size	XXS, XS, S, M
Installation Method	Flex Suspended
Accessories	Honeycomb Louvre, Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom

ELECTRICAL

Wattage	6W, 10W, 15W, 25W
Forward Current	150mA, 250mA, 350mA, 600mA
Voltage	240V
Dimming Control	1-10V Dimmable, Casambi Dimmable, DALI Dimmable, Phase-Cut Dimmable




O P T I C A L


Optic	Lens
Distribution	Spot / Narrow / Medium / Wide / Flood
CCT	2400K, 2700K, 3000K, 4000K
CRI	CRI90
System Lumen	261lm - 2182lm
System Efficacy	Up to 95lm/W
Light Output Ratio	80
Lifetime (L70B50)	50,000hrs

RoHS**IP20****A D D I T I O N A L**


LED Module	Luminus CXM-3 GEN4, Standard Tridonic SLE G7
LED Driver	Integral, Remote
Warranty	5 Years

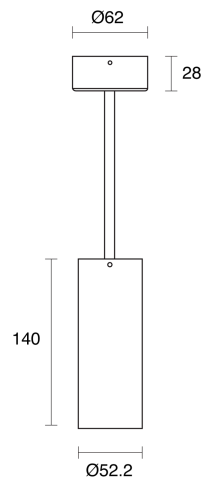


Andro XS

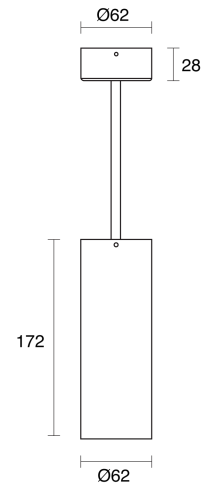

Andro S

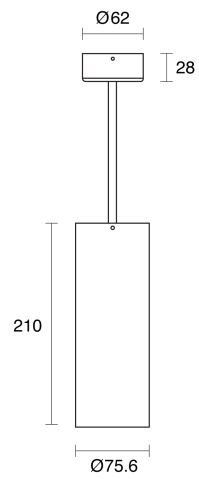

Andro M

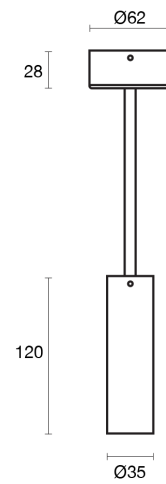

Andro XXS