

# ANDRO FLEX SUSPENDED

INDOOR / PENDANT

ambience

MAKING LIGHT WORK



## PHYSICAL

Size	XXS, XS, S, M
Installation Method	Flex Suspended
Accessories	Honeycomb Louvre, Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom

## ELECTRICAL

Wattage	6W, 10W, 15W, 25W
Forward Current	150mA, 250mA, 350mA, 600mA
Voltage	240V
Dimming Control	1-10V Dimmable, Casambi Dimmable, DALI Dimmable, Phase-Cut Dimmable




**O P T I C A L**


Optic	Lens
Distribution	Spot / Narrow / Medium / Wide / Flood
CCT	2400K, 2700K, 3000K, 4000K
CRI	CRI90
System Lumen	261lm - 2182lm
System Efficacy	Up to 95lm/W
Light Output Ratio	80
Lifetime (L70B50)	50,000hrs

**RoHS****IP20****A D D I T I O N A L**


LED Module	Luminus CXM-3 GEN4, Standard Tridonic SLE G7
LED Driver	Integral, Remote
Warranty	5 Years

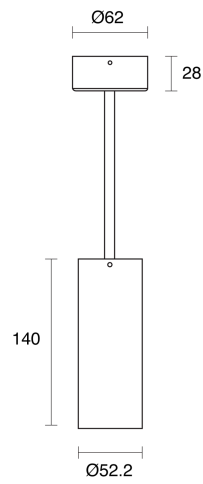


**Andro XS**

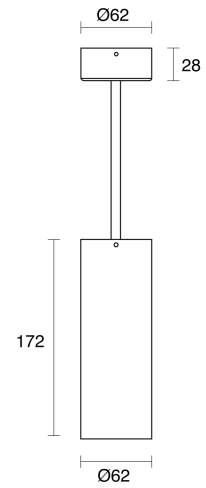

**Andro S**

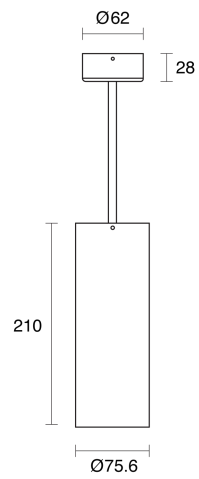

**Andro M**

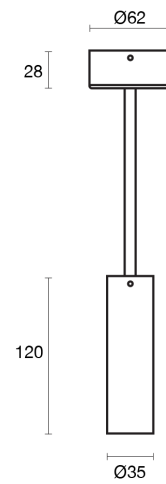

**Andro XXS**