

# DOWNUNDER OUT SQUARE FIXED SURFACE MOUNTED

OUTDOOR / WALL LIGHT

ambience  
MAKING LIGHT WORK



## PHYSICAL

Installation Method Fixed Surface Mounted

Accessories Without Accessory

IP Rating IP65

Finish Anthracite

## ELECTRICAL

Wattage 4.5W

Forward Current 500mA

Voltage 240V

Dimming Control Non-Dimmable



**RoHS**




**IP65**

## O P T I C A L

Distribution	Asymmetric
CCT	Dual-Color 3000K/4000K
CRI	CRI80
System Lumen	150lm
System Efficacy	38lm/W
Lifetime (L70B50)	30000hrs

## A D D I T I O N A L

LED Module	Osram
LED Driver	Integral
Warranty	5 Years

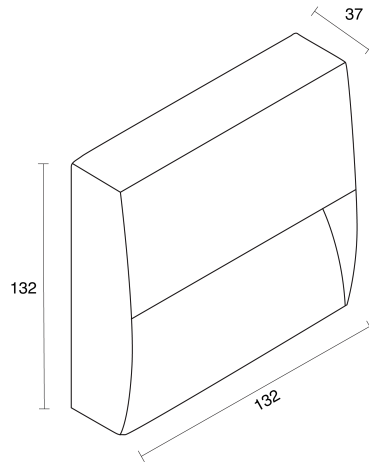

**Downunder Out Square**