

SERENE PANEL SUSPENDED

INDOOR / GENERAL

ambience

MAKING LIGHT WORK



PHYSICAL

Installation Method	Suspended
Accessories	Without Accessory
IP Rating	IP40
Finish	White

ELECTRICAL

Wattage	42W
Forward Current	1050mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Non-Dimmable, Phase-Cut Dimmable



RoHS




O P T I C A L

Optic	PMMA(Lens) + PS(Diffuser)
Distribution	Flood 90°
CCT	Tri-Color 3000K/3350K/4000K
CRI	CRI90
System Lumen	3400lm
System Efficacy	81lm/W
Light Output Ratio	85
Lifetime (L70B50)	50000hrs

IP40**A D D I T I O N A L**

LED Module	SMD4014
LED Driver	Remote
Warranty	5 Years

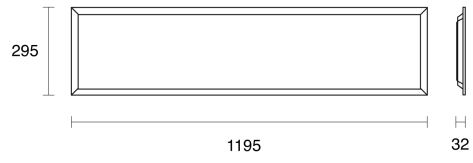

Serene Panel