

ZEUS ADJUSTABLE SURFACE MOUNTED

OUTDOOR / FLOODLIGHT

ambience

MAKING LIGHT WORK



PHYSICAL

| | |
|---------------------|--|
| Size | XS, S |
| Installation Method | Adjustable Surface Mounted |
| Accessories | Without Accessory |
| IP Rating | IP66 |
| Finish | Anthracite Grey, Matt Black, Textured Grey |
| Rotate Angle | 355° |
| Tilt Angle | +90°/-40° |

ELECTRICAL

| | |
|-----------------|---|
| Wattage | 8W, 20W |
| Voltage | 240V |
| Dimming Control | 1-10V Dimmable, DALI Dimmable, Non-Dimmable |

NARROW



MEDIUM



FLOOD



CE

RoHS

O P T I C A L

Distribution Narrow / Medium / Flood

CCT 3000K, 4000K

CRI CRI80

System Lumen 710lm - 1970lm

System Efficacy Up to 99lm/W

Lifetime (L70B50) 50000hrs



IP66


A D D I T I O N A L

LED Module CREE


LED Driver Integral

Warranty 5 Years

Add-Ons IK09 Rated

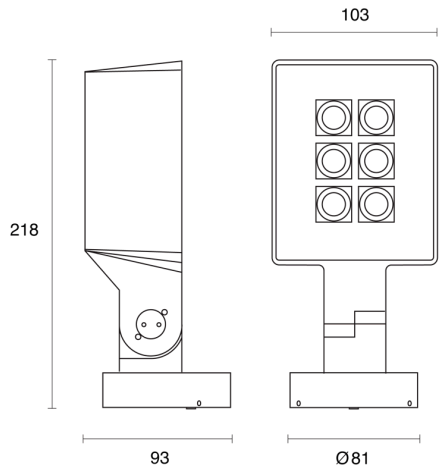

Zeus XS

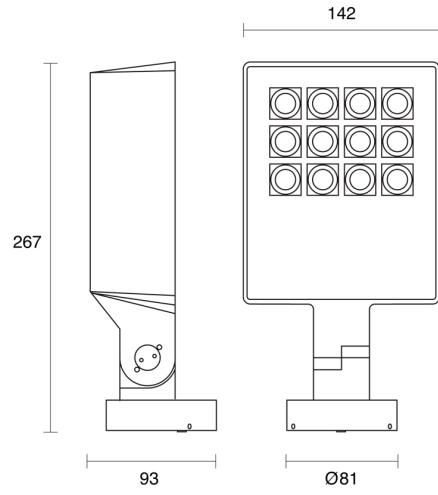

Zeus S