

# ZEUS ADJUSTABLE SURFACE MOUNTED

OUTDOOR / FLOODLIGHT

ambience

MAKING LIGHT WORK



## PHYSICAL

Size	XS, S
Installation Method	Adjustable Surface Mounted
Accessories	Without Accessory
IP Rating	IP66
Finish	Anthracite Grey, Matt Black, Textured Grey
Rotate Angle	355°
Tilt Angle	+90°/-40°

## ELECTRICAL

Wattage	8W, 20W
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Non-Dimmable

NARROW



MEDIUM



FLOOD



CE

RoHS

## O P T I C A L

Distribution Narrow / Medium / Flood

CCT 3000K, 4000K

CRI CRI80

System Lumen 710lm - 1970lm

System Efficacy Up to 99lm/W

Lifetime (L70B50) 50000hrs



**IP66**


## A D D I T I O N A L

LED Module CREE


LED Driver Integral

Warranty 5 Years

Add-Ons IK09 Rated

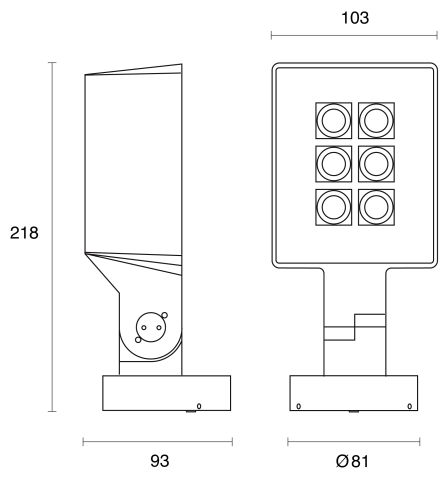

**Zeus XS**

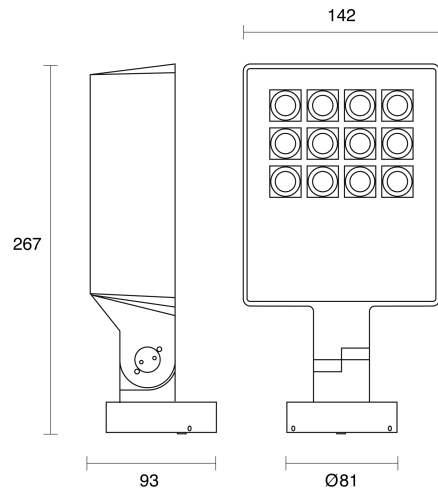

**Zeus S**