


# PURE 3 RECESSED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

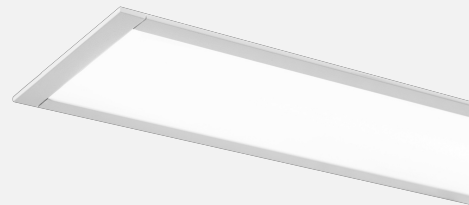

## PHYSICAL

Installation Method	Recessed
Cutout Size (mm)	77mmx100mm
IP Rating	IP20
Finish	Textured Black, Textured Silver, Textured White

## ELECTRICAL

Wattage	9.8, 12.3, 13.7, 15, 17.7, 18.9, 23.5, 23.6, 25.9, 26.3, 28.6, 29.6, 32.6, 32.8, 33.9, 35.8, 36, 36.2, 38.9, 39.4, 42.3, 45.5, 46.6, 47.1, 48.6, 50.4, 53.5, 54.3, 55.1, 59.3, 65.1, 65.6, 68.1, 70.8, 71.7, 74.8, 75.5, 82.5, 84.7, 88.9, 97.3, 97.5, 98.4, 107.6, 111.9, 127.1, 146
Forward Current	200mA, 250mA, 275mA, 300mA, 350mA, 400mA
Voltage	240V
Dimming Control	DALI-Dimmable, Non-Dimmable



**RoHS**



**IP20**

## O P T I C A L

Optic	Microprism, Microprism & Microfoil, Satine
-------	--

Distribution	Direct Only
--------------	-------------

CCT	3000K, 4000K
-----	--------------

CRI	CRI90
-----	-------

System Lumen	0lm - 0lm
--------------	-----------

System Efficacy	Up to 112lm/W
-----------------	---------------

Light Output Ratio	80
--------------------	----


Lifetime (L70B50)	50,000hrs
-------------------	-----------

## A D D I T I O N A L

LED Module	Tridonic Linear LLE
------------	---------------------

LED Driver	Integral
------------	----------

Warranty	5 Years
----------	---------

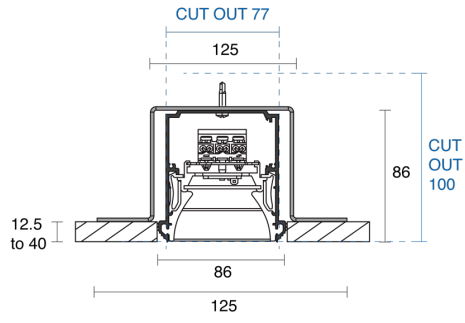

**Pure 3**