


PURE 3 RECESSED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

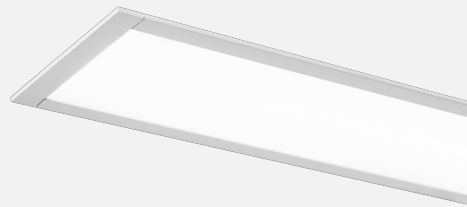

PHYSICAL

Installation Method	Recessed
Cutout Size (mm)	77mmx100mm
IP Rating	IP20
Finish	Textured Black, Textured Silver, Textured White

ELECTRICAL

Wattage	9.8, 12.3, 13.7, 15, 17.7, 18.9, 23.5, 23.6, 25.9, 26.3, 28.6, 29.6, 32.6, 32.8, 33.9, 35.8, 36, 36.2, 38.9, 39.4, 42.3, 45.5, 46.6, 47.1, 48.6, 50.4, 53.5, 54.3, 55.1, 59.3, 65.1, 65.6, 68.1, 70.8, 71.7, 74.8, 75.5, 82.5, 84.7, 88.9, 97.3, 97.5, 98.4, 107.6, 111.9, 127.1, 146
Forward Current	200mA, 250mA, 275mA, 300mA, 350mA, 400mA
Voltage	240V
Dimming Control	DALI-Dimmable, Non-Dimmable



RoHS



IP20

O P T I C A L

Optic Microprism, Microprism & Microfoil, Satine

Distribution Direct Only

CCT 3000K, 4000K

CRI CRI90

System Lumen 0lm - 0lm

System Efficacy Up to 112lm/W

Light Output Ratio 80


Lifetime (L70B50) 50,000hrs

A D D I T I O N A L

LED Module Tridonic Linear LLE

LED Driver Integral

Warranty 5 Years

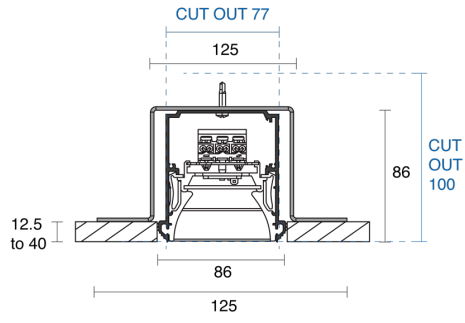

Pure 3