


# PURE 3 WALL MOUNTED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

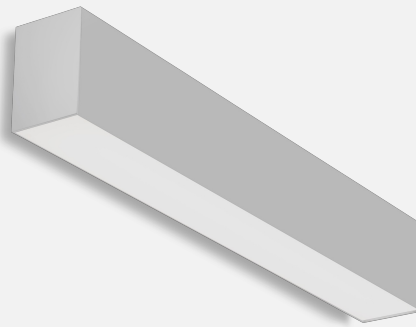

## PHYSICAL

Installation Method	Wall Mounted
IP Rating	IP20
Finish	Textured Black, Textured Silver, Textured White

## ELECTRICAL

Wattage	9.8, 12.3, 13.7, 15, 17.7, 18.9, 23.5, 23.6, 25.9, 26.3, 28.6, 29.6, 32.6, 32.8, 33.9, 35.8, 36, 36.2, 37.8, 38.9, 39.4, 42.3, 45.5, 46.6, 47.1, 47.3, 48.6, 50.4, 51.9, 52.6, 53.5, 54.3, 55.1, 59.3, 65.1, 65.2, 65.6, 68.1, 70.8, 71.7, 72.1, 74.8, 75.5, 75.6, 78.9, 82.5, 84.7, 88.9, 94.3, 94.7, 97.3, 97.5, 98.4, 105.2, 107.6, 108.6, 111.9, 114.7, 118.6, 127.1, 131.3, 135.6, 136.3, 141.5, 143.4, 146, 151, 155.6, 165, 169.5, 178, 194.7, 195, 196.9, 215.2, 223.9, 254.3, 292.1
Forward Current	200mA, 250mA, 275mA, 300mA, 350mA, 400mA
Voltage	240V
Dimming Control	DALI-Dimmable, Non-Dimmable



RoHS



IP20

**O P T I C A L**

Optic Microprism, Microprism & Microfoil, Satine

Distribution / Direct

CCT 3000K, 4000K

CRI CRI90

System Lumen 0lm - 0lm

System Efficacy Up to 124lm/W

Light Output Ratio 80


Lifetime (L70B50) 50,000hrs

**A D D I T I O N A L**

LED Module Tridonic Linear LLE

LED Driver Integral

Warranty 5 Years

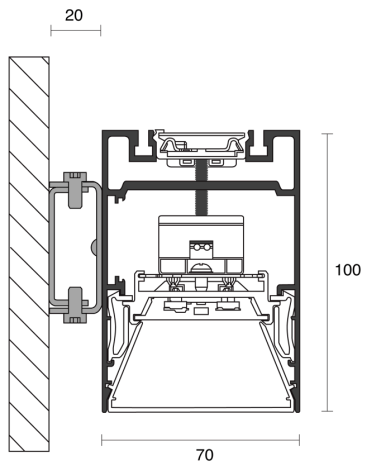

**Pure 3**