

BOOST FIXED SURFACE MOUNTED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK



PHYSICAL

Installation Method Fixed Surface Mounted

Accessories Rear tails 3m both ends

IP Rating IP20

ELECTRICAL

Wattage 5W/m, 10W/m, 14.5W/m, 20W/m, 25W/m

Voltage 24V

Dimming Control All types (order separately)



RoHS




IP20

O P T I C A L

Distribution	Flood 120°
CCT	1800K, 2400K, 2700K, 3000K, 3500K, 4000K, 6500K
CRI	CRI90
System Lumen	292lm - 3000lm
System Efficacy	Up to 120lm/W
Lifetime (L70B50)	50,000hrs

A D D I T I O N A L

LED Module	SMD2216 300LEDs/m, SMD2835 160LEDs/m
LED Driver	Remote
Warranty	5 Years

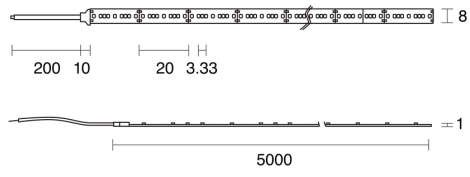

Boost