

BENDABLE MEDLEY SURFACE/CONCEALED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK




PHYSICAL

Installation Method	Surface/Concealed
Accessories	Bottom feed 3M FIG8 single end, Custom feed, End feed 3M FIG8 single end, Side feed 3M FIG8 single end
IP Rating	IP20

ELECTRICAL

Wattage	9W/m
Voltage	24V
Dimming Control	All types (order separately)



RoHS




O P T I C A L

Distribution	Flood 120°
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6500K, Blue, Green, Red
CRI	CRI90
System Lumen	360lm - 400lm
System Efficacy	Up to 44lm/W
Lifetime (L70B50)	50,000hrs(indoor); 36,000hrs(outdoor)

A D D I T I O N A L

LED Module	SMD2835 120LEDs/m
LED Driver	Remote
Warranty	3 Years
Add-Ons	Dual Bend; Minimum bending radius is 60mm; Max. length is 10m with power at single end and 20m with power at both ends; Also available in IP44 option.

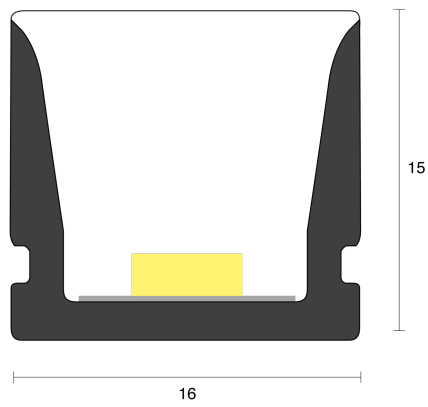

Bendable Medley Dual Bend