

BENDABLE MEDLEY SURFACE / CONCEALED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK



PHYSICAL

Installation Method Surface/Concealed

Accessories Bottom feed 3M FIG8 single end, Custom feed, End feed 3M FIG8 single end, Side feed 3M FIG8 single end

IP Rating IP20

ELECTRICAL

Wattage 9W/m

Voltage 24V

Dimming Control All types (order separately)



RoHS




IP20

O P T I C A L

| | |
|-------------------|--|
| Distribution | Flood 120° |
| CCT | 2700K, 3000K, 3500K, 4000K, 5000K, 6500K, Blue, Green, Red |
| CRI | CRI90 |
| System Lumen | 360lm - 400lm |
| System Efficacy | Up to 44lm/W |
| Lifetime (L70B50) | 50,000hrs(indoor); 36,000hrs(outdoor) |

A D D I T I O N A L

| | |
|------------|---|
| LED Module | SMD2835 120LEDs/m |
| LED Driver | Remote |
| Warranty | 3 Years |
| Add-Ons | Minimum bending radius is 60mm; Max. length is 10m with power at single end and 20m with power at both ends; Also available in IP44 option. |

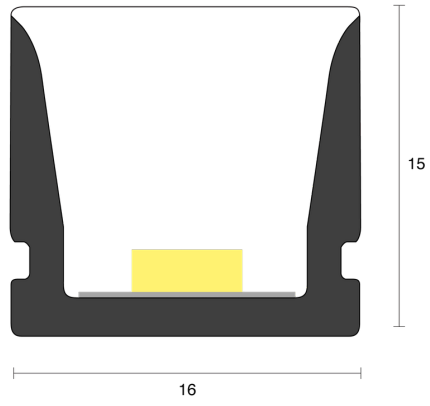

Bendable Medley Dual Bend