


BOOST DIM TO WARM FIXED SURFACE MOUNTED

INDOOR / LINEAR

ambience
MAKING LIGHT WORK

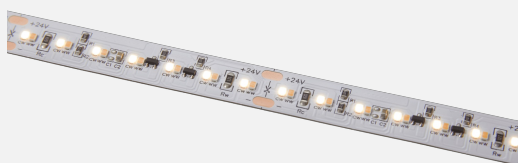


PHYSICAL

Installation Method	Fixed Surface Mounted
Accessories	Rear tails 300mm both ends
IP Rating	IP20

ELECTRICAL

Wattage	10W/m
Voltage	24V
Dimming Control	All types (order separately)



RoHS




IP20

O P T I C A L

Distribution	Flood 120°
CCT	Dim to Warm 1800K-3000K
CRI	CRI90
System Lumen	820lm/m
System Efficacy	82lm/W
Lifetime (L70B50)	50,000hrs

A D D I T I O N A L

LED Module	SMD2216 224LEDs/m
LED Driver	Remote
Warranty	5 Years

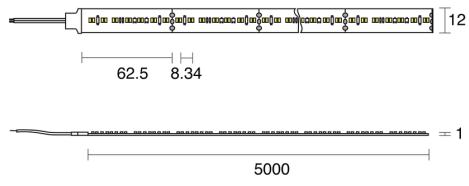

Boost Dim to Warm