


# PICCOLO SURFACE / CONCEALED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

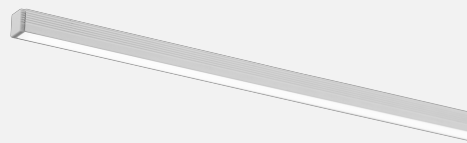

## PHYSICAL

Installation Method	Surface/Concealed
Accessories	Male/Female connector 2M, Open single end tail 3M, Custom
IP Rating	IP20
Finish	Textured White, Textured Black, Textured Silver, Custom

## ELECTRICAL

Wattage	5W/m, 7.2W/m, 8W/m
Voltage	24V
Dimming Control	All types (order separately)



RoHS



## OPTICAL


Optic	Opal, Smoked
Distribution	Flood 120°
CCT	1800K, 2400K, 2700K, 3000K, 3500K, 4000K, 6500K, Tunable 1800K-3000K, Tunable 2700K-6500K
CRI	CRI90
System Lumen	50lm - 276lm
System Efficacy	Up to 38lm/W
Lifetime (L70B50)	50,000hrs

## ADDITIONAL

LED Module	Boost Mini 5mm, Boost Tunable WH 5mm
LED Driver	Remote
Warranty	5 Years
Add-Ons	Suitable for concealed mounting



**IP20**

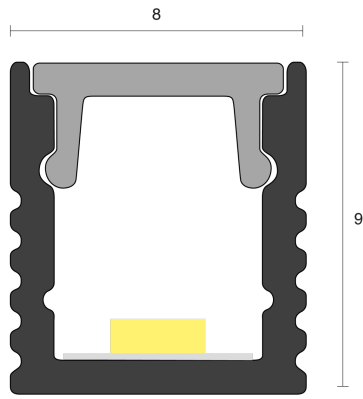

Piccolo