


OBOE SUSPENDED

CREATE | INDOOR / LINEAR

ambience

MAKING LIGHT WORK

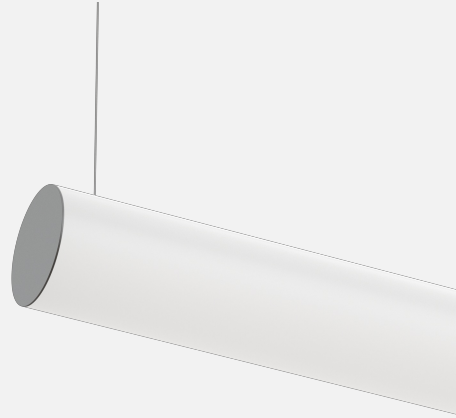

PHYSICAL

Size	XS, S
Installation Method	Suspended
Accessories	Suspension 1200mm, Suspension 3000mm, Custom
IP Rating	IP20
Finish	Textured White, Textured Black, Textured Silver, Customize

ELECTRICAL

Wattage	10W/m, 14.5W/m, 19.2W/m, 20W/m, 22W/m, 25W/m, 29W/m
Voltage	24V
Dimming Control	All types (order separately)



RoHS




O P T I C A L


Optic	Opal
Distribution	Flood 350°
CCT	1600K, 1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6500K, Amber, Blue, Cyan, Dim to Warm 1800K-3000K, Green, RGB, RGBW+1600K, RGBW+2700K, RGBW+3000K, RGBW+3500K, RGBW+4000K, RGBW+5000K, RGBW+6500K, Red, Tunable 1800K-3000K, Tunable 2700K-6500K
CRI	CRI80, CRI90
System Lumen	75lm - 2370lm
System Efficacy	Up to 95lm/W
Lifetime (L70B50)	50,000hrs

**IP20****A D D I T I O N A L**

LED Module	Boost 8mm, Boost 10mm, Boost Colour 10mm, Boost Dim to Warm 12mm, Boost RGB 10mm, Boost RGBW 12mm, Boost Tunable WH 10mm, Boost Ultra Warm 10mm
LED Driver	Remote
Warranty	5 Years

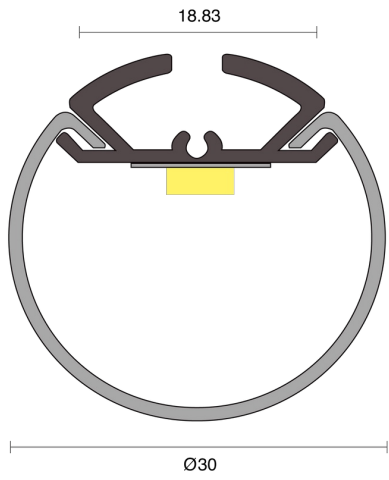

Oboe XS

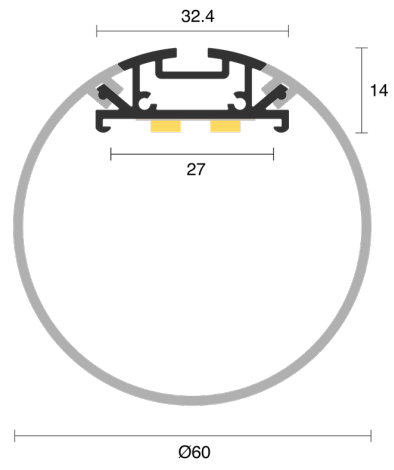

Oboe S