

WAVE FIXED SURFACE MOUNTED

OUTDOOR / LINEAR

ambience

MAKING LIGHT WORK



PHYSICAL

Installation Method	Fixed Surface Mounted
Accessories	Male/Female connector 2M, Open single end tail 3M, Custom
IP Rating	IP65

ELECTRICAL

Wattage	5W/m, 10W/m, 14.5W/m, 20W/m
Voltage	24V
Dimming Control	All types (order separately)



RoHS



O P T I C A L


Optic	Clear, Opal
Distribution	Flood 350°
CCT	1600K, 1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6500K, Dim to Warm 1800K-3000K
CRI	CRI90
System Lumen	176lm - 1386lm
System Efficacy	Up to 84lm/W
Lifetime (L70B50)	50,000hrs

A D D I T I O N A L

LED Module	Boost 8mm, Boost 10mm, Boost Dim to Warm 12mm, Boost Ultra Warm 10mm
LED Driver	Remote
Warranty	3 Years



IP65

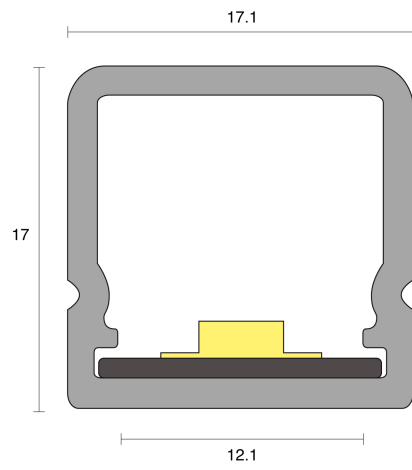

Wave