


HARMONY SURFACE / CONCEALED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

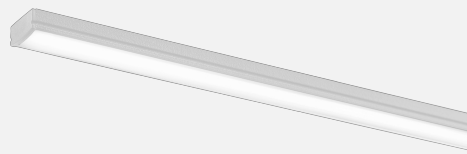

PHYSICAL

Installation Method	Surface/Concealed
Accessories	Male/Female connector 2M, Open single end tail 3M, Custom
IP Rating	IP20
Finish	Textured White, Textured Black, Textured Silver, Custom

ELECTRICAL

Wattage	5W/m, 10W/m, 14.5W/m
Voltage	24V
Dimming Control	All types (order separately)



RoHS



OPTICAL


Optic	Clear, Frost, Opal, Smoked
Distribution	Flood 120°
CCT	1600K, 1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6500K
CRI	CRI90
System Lumen	80lm - 1281lm
System Efficacy	Up to 95lm/W
Lifetime (L70B50)	50,000hrs

ADDITIONAL

LED Module	Boost 8mm, Boost Ultra Warm 10mm
LED Driver	Remote
Warranty	5 Years
Add-Ons	Suitable for concealed mounting



IP20

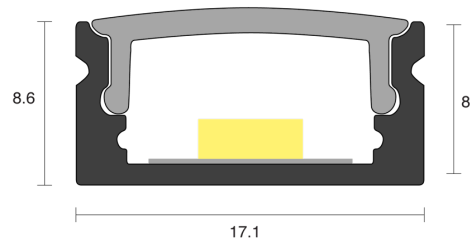

Harmony