


HARMONY SURFACE / CONCEALED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

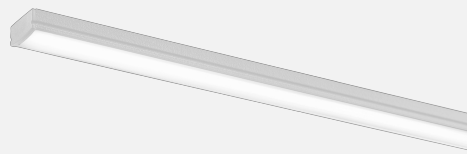

PHYSICAL

| | |
|---------------------|-----------------------------------------------------------|
| Installation Method | Surface/Concealed |
| Accessories | Male/Female connector 2M, Open single end tail 3M, Custom |
| IP Rating | IP20 |
| Finish | Textured White, Textured Black, Textured Silver, Custom |

ELECTRICAL

| | |
|-----------------|------------------------------|
| Wattage | 5W/m, 10W/m, 14.5W/m |
| Voltage | 24V |
| Dimming Control | All types (order separately) |



RoHS



OPTICAL


| | |
|-------------------|----------------------------------------------------------------------|
| Optic | Clear, Frost, Opal, Smoked |
| Distribution | Flood 120° |
| CCT | 1600K, 1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6500K |
| CRI | CRI90 |
| System Lumen | 80lm - 1281lm |
| System Efficacy | Up to 95lm/W |
| Lifetime (L70B50) | 50,000hrs |

ADDITIONAL

| | |
|------------|----------------------------------|
| LED Module | Boost 8mm, Boost Ultra Warm 10mm |
| LED Driver | Remote |
| Warranty | 5 Years |
| Add-Ons | Suitable for concealed mounting |



IP20

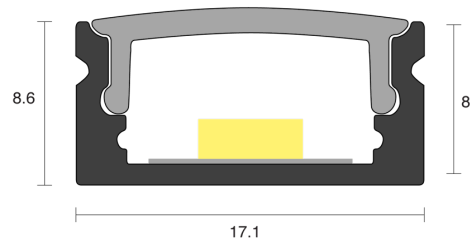

Harmony