


# SERENADE SURFACE / CONCEALED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

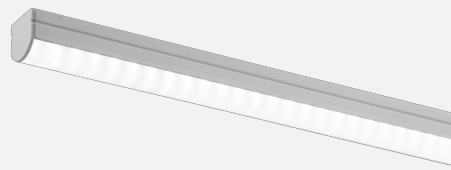

## PHYSICAL

Installation Method	Surface/Concealed
Accessories	Male/Female connector 2M, Open single end tail 3M, Custom
IP Rating	IP20
Finish	Textured White, Textured Black, Textured Silver, Custom

## ELECTRICAL

Wattage	5W/m, 10W/m, 14.5W/m, 19.2W/m, 20W/m, 22W/m
Voltage	24V
Dimming Control	All types (order separately)



## OPTICAL

Optic	Clear, Frost
Distribution	Spot / Medium / Wide / Flood
CCT	1600K, 1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6500K, Amber, Blue, Cyan, Green, RGB, Red, Tunable 1800K-3000K, Tunable 2700K-6500K
CRI	CRI80, CRI90
System Lumen	86lm - 1471lm
System Efficacy	Up to 89lm/W
Lifetime (L70B50)	50,000hrs

## ADDITIONAL


LED Module	Boost 8mm, Boost 10mm, Boost Colour 10mm, Boost RGB 10mm, Boost Tunable WH 10mm, Boost Ultra Warm 10mm
LED Driver	Remote
Warranty	5 Years
Add-Ons	Suitable for concealed mounting



**RoHS**



**IP20**

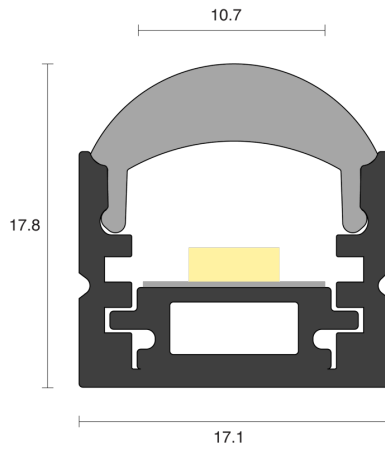

**Serenade**