


SOLO FIXED RECESSED

INDOOR / LINEAR

ambience

MAKING LIGHT WORK

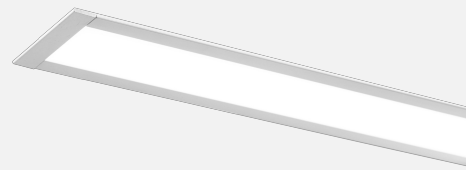

PHYSICAL

| | |
|---------------------|---|
| Installation Method | Fixed Recessed |
| Cutout Size (mm) | 38mm |
| Accessories | Male/Female connector 2M, Open single end tail 3M, Custom |
| IP Rating | IP20 |
| Finish | Textured White, Textured Black, Textured Silver, Custom |

ELECTRICAL

| | |
|-----------------|--|
| Wattage | 10W/m, 14.5W/m, 19.2W/m, 20W/m, 22W/m, 25W/m, 29W/m, 40W/m |
| Voltage | 24V |
| Dimming Control | All types (order separately) |



RoHS




O P T I C A L

| | |
|-------------------|---|
| Optic | Frost, Opal, Smoked |
| Distribution | Flood 120° |
| CCT | 1600K, 1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6500K, Amber, Blue, Cyan, Dim to Warm 1800K-3000K, Green, RGB, RGBW+1600K, RGBW+2700K, RGBW+3000K, RGBW+3500K, RGBW+4000K, RGBW+5000K, RGBW+6500K, Red, Tunable 1800K-3000K, Tunable 2700K-6500K |
| CRI | CRI80, CRI90 |
| System Lumen | 31lm - 2188lm |
| System Efficacy | Up to 80lm/W |
| Lifetime (L70B50) | 50,000hrs |

A D D I T I O N A L

| | |
|------------|---|
| LED Module | Boost 8mm, Boost 10mm, Boost Colour 10mm, Boost Dim to Warm 12mm, Boost RGB 10mm, Boost RGBW 12mm, Boost Tunable WH 10mm, Boost Ultra Warm 10mm |
| LED Driver | Remote |
| Warranty | 5 Years |

**IP20**

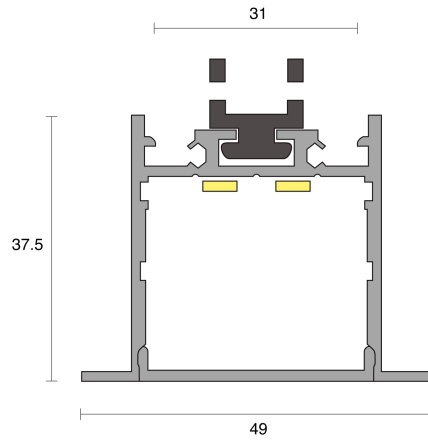

Solo