

# ANDRO TRIMLESS ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK



## PHYSICAL

Size	XXS, XS, S, M, L
Installation Method	Adjustable Recessed
Cutout Size (mm)	Ø72mm, Ø95mm, Ø105mm, Ø122mm, Ø136mm
Accessories	Honeycomb Louvre, Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom
Rotate Angle	355°
Tilt Angle	80°, 90°

## ELECTRICAL

Wattage	6W, 10W, 15W, 25W, 35W
Forward Current	150mA, 250mA, 350mA, 600mA, 900mA
Voltage	240V
Dimming Control	1-10V Dimmable, Casambi Dimmable, DALI Dimmable, Phase-Cut Dimmable



## O P T I C A L

Optic	Lens
Distribution	Spot / Narrow / Medium / Wide / Flood
CCT	2400K, 2700K, 3000K, 4000K
CRI	CRI90
System Lumen	261lm - 3177lm
System Efficacy	Up to 95lm/W
Light Output Ratio	80
Lifetime (L70B50)	50,000hrs

## A D D I T I O N A L


LED Module	Luminus CXM-3 GEN4, Standard Tridonic SLE G7
LED Driver	Remote
Warranty	5 Years

**RoHS**




**IP20**




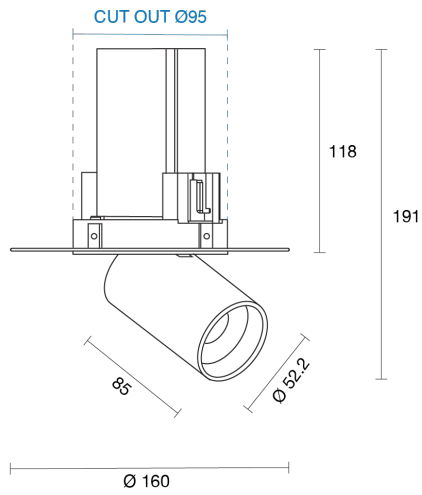


**Andro XS Trimless**

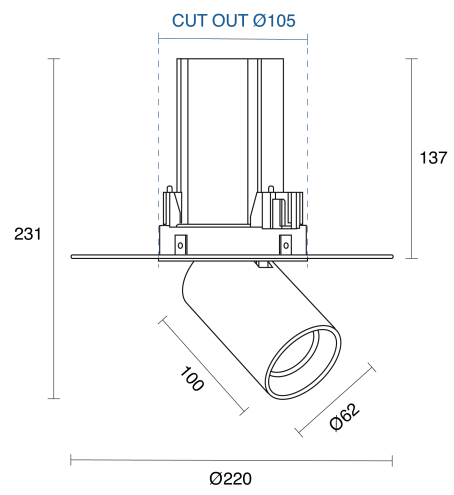


**Andro S Trimless**

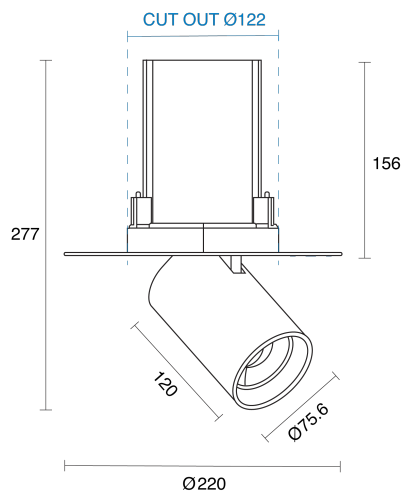

**Andro M Trimless**

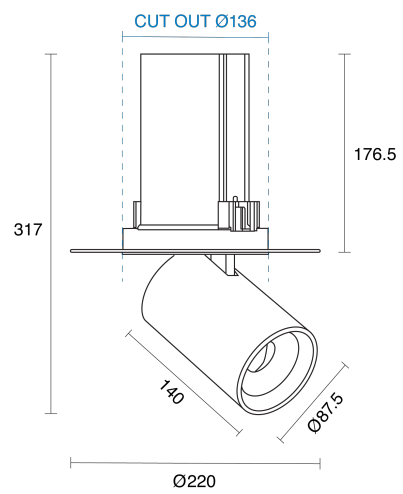

**Andro L Trimless**

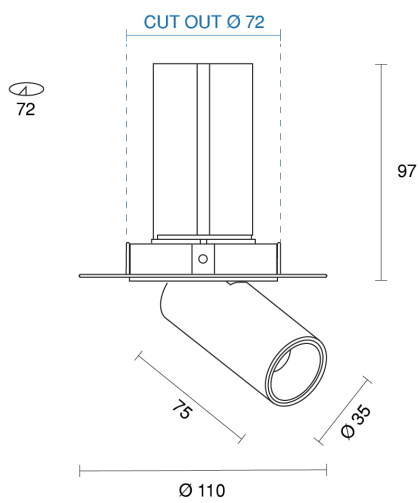

**Andro XXS Trimless**