


# ANDRO TRIMLESS ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK

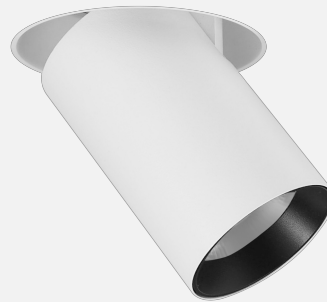

## PHYSICAL

Size	S, M, L
Installation Method	Adjustable Recessed
Cutout Size (mm)	Ø105mm, Ø122mm, Ø136mm
Accessories	Honeycomb Louvre, Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom
Rotate Angle	355°
Tilt Angle	80°

## ELECTRICAL

Wattage	15W, 25W, 35W
Forward Current	350mA, 600mA, 900mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Phase-Cut Dimmable



RoHS

## O P T I C A L

Optic	Lens
Distribution	Narrow / Medium / Wide / Flood
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	1112lm - 3177lm
System Efficacy	Up to 91lm/W
Light Output Ratio	80
Lifetime (L70B50)	50,000hrs


## A D D I T I O N A L

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	5 Years




**IP20**




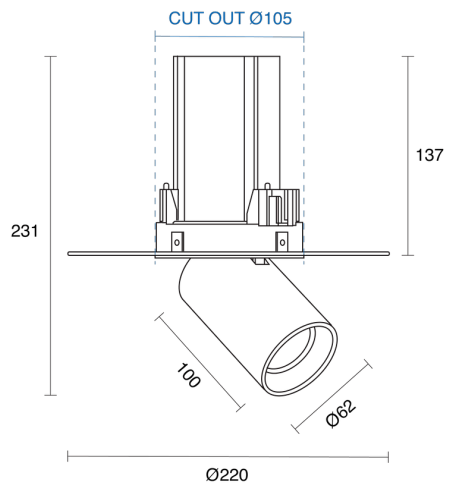

**Andro S Trimless**

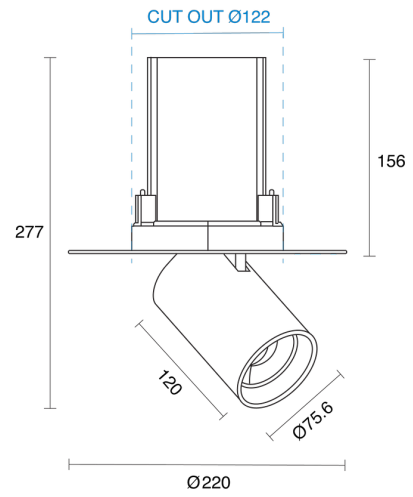

**Andro M Trimless**

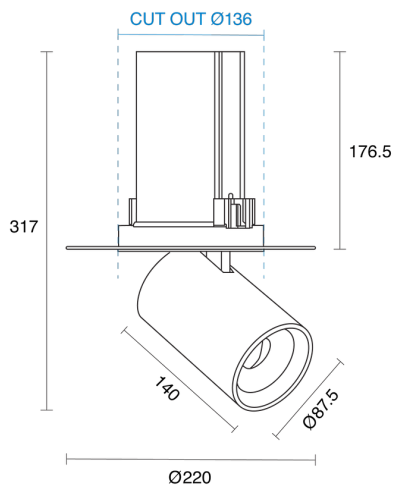

**Andro L Trimless**