

# COGNITO ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK



## PHYSICAL

Installation Method	Adjustable Recessed
Cutout Size (mm)	Ø110mm
Accessories	Honeycomb Louvre, Without Accessory
IP Rating	IP20
Finish	White, Black, Custom
Rotate Angle	355°
Tilt Angle	30°

## ELECTRICAL

Wattage	14W, 20W, 28W
Forward Current	350mA, 500mA, 700mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Non-Dimmable, Phase-Cut Dimmable

NARROW



MEDIUM



WIDE



FLOOD



RoHS

## O P T I C A L


Optic	Reflector
Distribution	Narrow / Medium / Wide / Flood
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	1259lm - 2554lm
System Efficacy	Up to 109lm/W
Light Output Ratio	85
Lifetime (L70B50)	50000hrs

## A D D I T I O N A L

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	5 Years



**IP20**

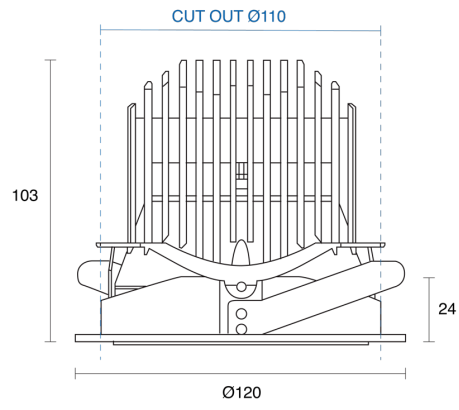

**Cognito**