

MO-PIN FIXED RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK



PHYSICAL

Installation Method	Fixed Recessed
Cutout Size (mm)	Ø75mm
Accessories	Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom

ELECTRICAL

Wattage	8W, 10W
Forward Current	180mA, 250mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Phase-Cut Dimmable



RoHS




O P T I C A L

Optic	Reflector
Distribution	Narrow 19°
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	241lm - 314lm
System Efficacy	Up to 33lm/W
Light Output Ratio	70
Lifetime (L70B50)	50000hrs

IP20**A D D I T I O N A L**

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	3 Years

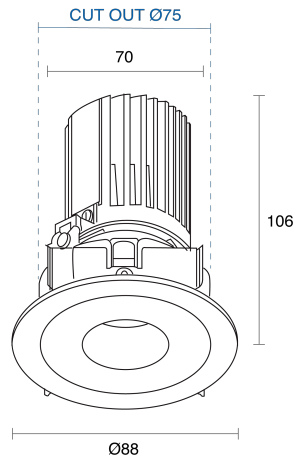

Mo-Pin