


# FLOW ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK

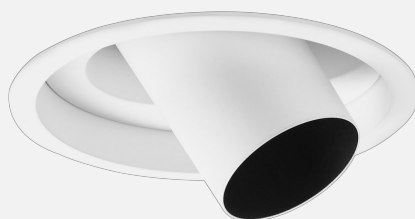

## PHYSICAL

Size	XS
Installation Method	Adjustable Recessed
Cutout Size (mm)	Ø127mm
Accessories	Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom
Tilt Angle	38°

## ELECTRICAL

Wattage	8W, 10W, 15W, 22W
Forward Current	180mA, 250mA, 350mA, 500mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Phase-Cut Dimmable

SPOT



NARROW



MEDIUM



RoHS

## O P T I C A L


Optic	Reflector
Distribution	Spot / Narrow / Medium
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	370lm - 912lm
System Efficacy	Up to 53lm/W
Light Output Ratio	40
Lifetime (L70B50)	50000hrs

## A D D I T I O N A L

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	3 Years



**IP20**

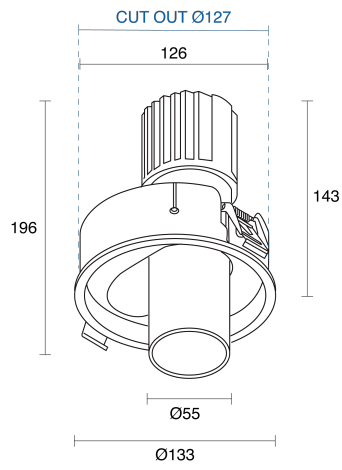

**Flow XS**