


FLOW TRIMLESS ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience
MAKING LIGHT WORK

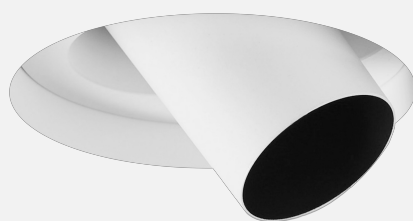

PHYSICAL

Size	XS
Installation Method	Adjustable Recessed
Cutout Size (mm)	Ø130mm
Accessories	Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom
Tilt Angle	38°

ELECTRICAL

Wattage	8W, 10W, 15W, 22W
Forward Current	180mA, 250mA, 350mA, 500mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Phase-Cut Dimmable

SPOT



NARROW



MEDIUM



RoHS

O P T I C A L


Optic	Reflector
Distribution	Spot / Narrow / Medium
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	370lm - 912lm
System Efficacy	Up to 53lm/W
Light Output Ratio	40
Lifetime (L70B50)	50000hrs

A D D I T I O N A L

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	3 Years



IP20

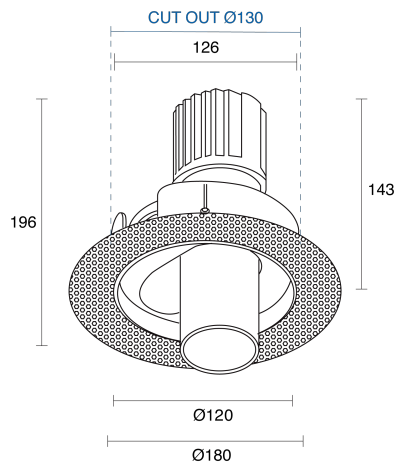

Flow XS Trimless