

FLUX ROUND ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK



PHYSICAL

Size	XS
Installation Method	Adjustable Recessed
Cutout Size (mm)	Ø102mm
Accessories	Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom
Tilt Angle	25°

ELECTRICAL

Wattage	8W, 10W
Forward Current	180mA, 250mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Phase-Cut Dimmable

NARROW



MEDIUM



WIDE



RoHS

O P T I C A L


Optic	Reflector
Distribution	Narrow / Medium / Wide
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	482lm - 711lm
System Efficacy	Up to 75lm/W
Light Output Ratio	70
Lifetime (L70B50)	50000hrs

A D D I T I O N A L

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	3 Years



IP20

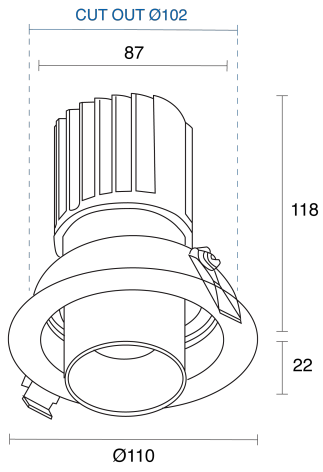

Flux XS Round