

# FLUX TRIPLE ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK



## PHYSICAL

Size	XS, S
Installation Method	Adjustable Recessed
Cutout Size (mm)	308mmx100mm, 430mmx130mm
Accessories	Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom
Tilt Angle	24°, 25°

## ELECTRICAL

Wattage	24W, 30W, 45W, 60W, 84W
Forward Current	180mA, 250mA, 350mA, 500mA, 700mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Non-Dimmable, Phase-Cut Dimmable

NARROW



MEDIUM



WIDE



RoHS

## O P T I C A L


Optic	Reflector
Distribution	Narrow / Medium / Wide
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	1446lm - 6942lm
System Efficacy	Up to 95lm/W
Light Output Ratio	70
Lifetime (L70B50)	50000hrs

## A D D I T I O N A L


LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	3 Years



**IP20**

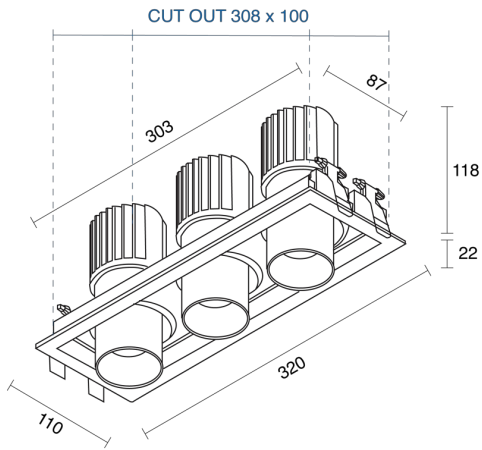

**Flux XS Triple**

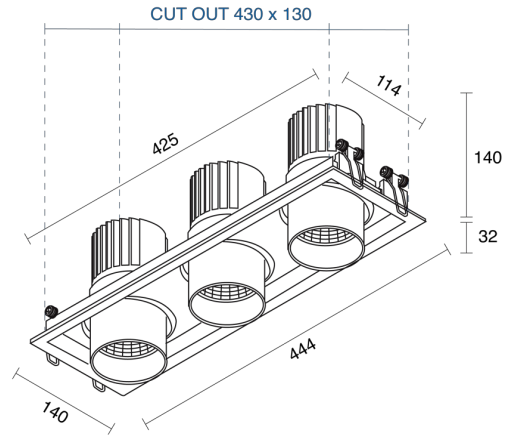

**Flux S Triple**