

BRAVADO ROUND ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK



PHYSICAL

Installation Method	Adjustable Recessed
Cutout Size (mm)	Ø166mm
Accessories	Honeycomb Louvre, Without Accessory
IP Rating	IP20
Finish	Textured Black, Textured White, Custom
Tilt Angle	20°

ELECTRICAL

Wattage	20W, 28W, 36W, 42W
Forward Current	500mA, 700mA, 900mA, 1050mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Non-Dimmable, Phase-Cut Dimmable

NARROW



MEDIUM



WIDE



RoHS

O P T I C A L


Optic	Reflector
Distribution	Narrow / Medium / Wide
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	1891lm - 4058lm
System Efficacy	Up to 118lm/W
Light Output Ratio	70
Lifetime (L70B50)	50000hrs

A D D I T I O N A L

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	3 Years



IP20

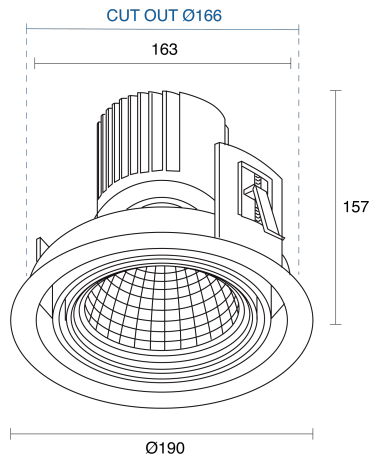

Bravado Round