

BRAVADO SQUARE ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK



PHYSICAL

Installation Method	Adjustable Recessed
Cutout Size (mm)	125mmx125mm
Accessories	Honeycomb Louvre, Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom
Tilt Angle	20°

ELECTRICAL

Wattage	20W, 28W
Forward Current	500mA, 700mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Non-Dimmable, Phase-Cut Dimmable

NARROW



MEDIUM



WIDE



RoHS

O P T I C A L


Optic	Reflector
Distribution	Narrow / Medium / Wide
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	1891lm - 2886lm
System Efficacy	Up to 118lm/W
Light Output Ratio	70
Lifetime (L70B50)	50000hrs

A D D I T I O N A L

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	3 Years



IP20

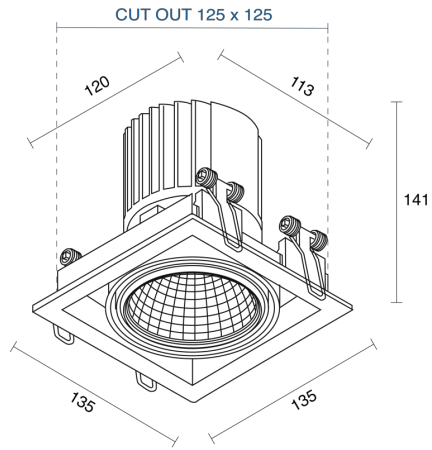

Bravado Square